

The Integration of Drones and IoT in Smart City Networks

Laith S. Ismail

Al-Turath University, Baghdad 10013, Iraq.
Email: Laith.sabaa@uoturath.edu.iq

Haithem Kareem Abass

Al-Mansour University College, Baghdad 10067, Iraq.
Email: haithem.kareem@muc.edu.iq

Mitalipova Ainura Nurmatovna (Corresponding author)

Osh State University, Osh City 723500, Kyrgyzstan.
Email: mit_ai_nur@oshsu.kg

Nataliia Bodnar

Al-Rafidain University College Baghdad 10064, Iraq.
Email: natalia.bodnar@ruc.edu.iq

Ali Alsaray

Madenat Alelem University College, Baghdad 10006, Iraq.
Email: ali.kadhom@mauc.edu.iq

| Received: 2025 | Accepted: 2025

Abstract

Background: Smart city technology solutions have recently ramped up the utilization of drones with Internet of Things (IoT) technologies for improving smart city systems. IoT sensors combined with real-time communication ad hoc network drones are also another area with great potential including traffic monitoring, environment management, disaster management, etc. Nevertheless, issues regarding energy consumption and density, the number of nodes that can be incorporated into the network, as well as the issue of avoiding collisions between the signal sent by one node with the signals that may be transmitted by other nodes are still observed as essential impediments to the wide application of WSNs.

Objective: The article seeks to propose and assess algorithms for operating drone-IoT systems whilst dealing with issues like energy efficiency, real-time data communication, avoiding mid-air collisions, and dealing with the increasing number of systems in crowded urban areas.

Iranian Journal of
**Information
Processing and
Management**

Iranian Research Institute
for Information Science and Technology
(IranDoc)

ISSN 2251-8223

eISSN 2251-8231

Indexed by SCOPUS, ISC, & LISTA

Special Issue | Summer 2025 | pp.895-932

<https://doi.org/10.22034/jipm.2025.728347>



Methods: This study utilizes a two-time algorithm technique that was adopted from the prior study. The first algorithm provides a method for speed and position control of drones, ensuring that the distance between the drones is sufficient and not violable. The second algorithm is centered on energy reduction, which selects the precise energy usage by employing path planning in real time. The effectiveness of these algorithms was determined using simulation models with respect to metrics including latency, energy consumption, and scalability.

Results: The proposed system revealed the systems' improvements in energy efficiency, fewer collisions, and strong scalability of drone management. Main conclusions possible to conclude during the experiment reveal the system's generic aptitude to the different urban situations and its stability in changing traffic conditions.

Conclusion: The article presents a scalable and efficient solution for extending drone applications to smart cities using IoT platforms. In this way, the results can serve as the further theoretical and experimental base for investigating the trends of management and the infrastructure of cities.

Keywords: Smart cities, Internet of Things (IoT), drones, UAVs, data analytics, urban infrastructure, traffic monitoring, IoT integration, real-time data, predictive maintenance.

1. Introduction

The growth of urban society and the complexity of management systems have led to a transformation in city management by leveraging technologies that enhance efficiency, safety, and livability. Among these innovations, the Internet of Things (IoT) and Unmanned Aerial Vehicles (UAVs or drones) have become integral to smart city networks (Qasim and Jawad 2024). IoT connects and manages multiple devices through data-sharing networks, while drones, equipped with advanced sensing capabilities, offer solutions for various urban issues, including traffic monitoring, environmental monitoring, and emergency response (Honcharenko et al. 2024). The adoption of IoT and recent advancements in drone technology enable real-time data collection to better manage smart cities aligned with sustainability and quality of life goals for citizens (Hoque et al. 2022).

Both drones and IoT, as individual technologies and when used collectively, contribute significantly to smart city projects. IoT devices monitor city infrastructure and environmental conditions, analyzing collected data using advanced analytics, including AI. For example, IoT sensors can measure air quality, traffic congestion, and energy usage. Drones, with their mobility, can access areas that are challenging for ground-based systems, such as rooftops, densely populated regions, or disaster-affected zones. The

combination of drones' mobility and IoT's data processing capabilities results in innovative, intelligent systems that respond to real-time events for surveillance and control. Earlier research indicates that IoT has positively impacted service delivery, resource management, and environmental concerns in urban areas (Srivastava 2022).

Surveillance and monitoring are among the many areas that benefit from drone technology in smart cities. As metropolitan areas grow, the demand for improved traffic control and enhanced security increases. Intelligent drones with high-definition cameras and IoT sensors can capture traffic images, detect signals, and feed information to traffic control centers (Qasim et al. 2022; Ali et al. 2024). This real-time data aids decision-making regarding traffic light changes, road closures, or emergency vehicle routing. Drones are particularly suited for monitoring public events and spaces where other techniques may be impractical (Gohari et al. 2022).

Additionally, drones and IoT sensors can monitor air pollution and noise levels, essential parameters for planning smart city functions and monitoring citizens' health conditions (De Fazio et al. 2022). However, implementing drones and IoT in smart cities involves challenges, such as network availability, congestion, and data security. The vast amount of data produced by IoT devices and drones can lead to network overload, compromising data timeliness and accuracy. Moreover, transmitting real-time aerial images poses significant data security challenges and potential cyber risks (Qasim, Jawad, and Majeed 2023). Strong encryption and secure data channels are necessary to mitigate these risks, as highlighted in several studies (Jghef et al. 2022). Regulatory frameworks also influence drone utilization within cities due to aviation and privacy laws (Tran and Nguyen 2022).

Addressing these challenges requires efficient, secure, and robust networks supporting IoT devices and drones. Disparate technologies can operate efficiently in complex urban environments when managed by AI-enhanced predictive control algorithms. Predictive maintenance helps city officials identify and address infrastructure issues before they escalate, saving costs and time. Drones integrated with IoT enhance the efficiency of smart city networks in managing daily and emergency situations, promoting urban resilience and sustainability (Yu et al. 2022).

The combination of drones and IoT in smart city networks holds significant potential for advancing urban development. However, successful deployment

depends on overcoming technical, regulatory, and security obstacles. Further investigation and collaboration among technology suppliers, city managers, and legislative bodies are essential for the effective implementation of IoT and drones in future smart cities.

1.1. The Aim of the Article

The article aims to map and advance research directions concerning the integration of drone and IoT technologies within smart city contexts. Major operational challenges for drones include energy consumption, context responsiveness, obstacle avoidance, and scalability. Through proposing, designing, and assessing enhanced algorithms, this investigation seeks to ensure that drone-IoT systems are effectively calibrated to meet the diverse urban demands, ranging from traffic monitoring and environmental assessments to disaster management.

Building upon the literature review, this research highlights the limitations of conventional solutions and the necessity for practical, sustainable, and effective approaches to meet the needs of future urban infrastructures. The introduced system enhances contextual applicability by utilizing data collected from the operational environment and employing adaptive algorithms. Consequently, key factors contributing to the safety, energy efficiency, and reliability of drone operations are dynamically achieved. Additionally, it addresses current research gaps through a systematic approach that integrates issues such as latency reduction, energy optimization, and network scalability.

Therefore, this article aims to enhance the understanding of drone-IoT integration in smart cities by developing a comprehensive framework that meets contemporary management requirements. The identification of contextualized outcomes and the prescribed strategies and methods in this study support the advancement of innovations for the prudent and reliable development of urban infrastructures. Ultimately, these advancements aim to improve the quality of life for city dwellers and address the complex challenges posed by modern urban environments.

1.2. Problem Statement

The increasing demand for urban housing has accelerated city growth rates, leading to the development of complex infrastructures that require innovative

management approaches. Specifically, IoT-enhanced drones have become instrumental in addressing urban development challenges such as traffic congestion and air pollution. However, several critical issues significantly constrain the functional effectiveness, expandability, and stability of drones in smart cities.

One primary challenge is power consumption. Despite their advanced capabilities, drones have limited battery capacity, restricting their range and flight duration. Traditional path planning models often fail to account for environmental changes, leading to inefficient energy use. It is essential to emphasize that without efficient energy management, the large-scale deployment of drones remains doubtful.

Another issue involves avoiding collisions in urban areas with high traffic intensity. As the number of drones in a specific area increases, so does the likelihood of accidents. Current approaches are primarily feed-based or limited to a fixed number of trajectories at a time, making them unrealistic for dynamic environments.

Additionally, network scalability poses a significant challenge to the integration of drones and IoT. High-density networks are prone to lower throughput, increased latency, high packet drop rates, and bandwidth bottlenecks, which hinder the effective handling of real-time data in urban areas. Current models do not adequately address these problems, resulting in non-scalable and unstable performance under high loads.

The lack of robust data protection mechanisms and reliable communication further complicates drone-IoT system integration. Flaws in the communication process undermine the security and reliability of these applications in critical areas such as disaster management and law enforcement.

This study addresses these challenges by proposing robust techniques for energy efficiency, obstacle avoidance, and network scalability. The research significantly contributes to the development of recent, optimal, and dependable approaches to support drone-IoT synergy in contemporary smart cities.

2. Literature Review

The interactive management of smart cities through the integration of drone and IoT technologies encompasses aspects such as timely data acquisition,

efficient service delivery, and improved urban planning. This rapidly growing domain has garnered significant attention from scholars, with numerous important works providing insights into application, methodology, and correlations. However, there remain areas that require further exploration, necessitating new ideas and methods to advance this field.

Recent research has focused on the durability of UAVs within IoT systems and networks. For example, Alsamhi et al. (2021) explored the application of UAVs in supporting green IoT applications in B5G networks, considering energy perspectives (Alsamhi et al. 2021). While their work demonstrates positive environmental impacts, it does not address the implementation of these measures in large cities. Similarly, Abbas et al. (2023) conducted a survey on UAVs for smart cities, emphasizing control system aspects (Abbas et al. 2023). However, their assessment does not consider the compatibility of UAV models from different manufacturers, a crucial factor for UAV application.

Security and privacy also present significant challenges. Yahuza et al. (2021) offered a taxonomy of security threats in the Internet of Drones (IoD) and emphasized the need for robust cryptographic techniques (Yahuza et al. 2021). Despite their valuable insights, the research does not propose effective, tangible solutions for urban settings where security breaches could cause serious harm. In a related context, Amodu et al. (2023) proposed a general architecture for age-aware data collection in UAV-aided sensor networks and investigated optimal operational design. However, they could not provide the real-time response essential for high-density IoT infrastructure in urban areas (Amodu et al. 2023).

Environmental monitoring is another area of interest. Alshbatat (2023) introduced autonomous hexacopters for air quality management, contributing to sustainable development (Alshbatat 2023). However, this approach does not consider integration with other IoT systems or address the replication of such solutions across entire cities. Asaamoning et al. (2021) examined drone swarms as networked control systems, focusing on coordination. Their work, however, fails to consider network delay, a critical issue for real-time urban applications (Asaamoning et al. 2021).

Pavlenko et al. (2023) identified potential AI applications to support UAV activities, suggesting AI solutions to enhance control system effectiveness (Pavlenko et al. 2023). While promising, their work does not address energy

consumption during extended use, a key requirement for smart city applications. Similarly, Sun et al. (2021) utilized deep reinforcement learning to optimize urgency and power consumption in UAV-based data gathering. This model remains largely conceptual, with limited testing in real-life applications (Sun et al. 2021).

Urban traffic management also benefits from drone and IoT integration. Bisio et al. (2022) discussed drone-based road traffic monitoring systems and concluded their utility for traffic control (Bisio et al. 2022). However, their study does not illustrate the integration of these systems with existing smart traffic systems. Lucic et al. (2023) described opportunities for UAVs in dynamic aerial infrastructures for smart transportation systems but did not address the security threats of these networks (Lucic et al. 2023). Additionally, Salunke (2023) introduced predictive modeling based on drone imagery for smart traffic lights, without considering its applicability in high-density areas (Salunke 2023).

The literature also highlights the potential for industrial IoT applications. Miao et al. (2023) described optimization methods for mobile path planning of drone swarms within mobile edge computing, including network congestion (Miao et al. 2023). However, this study is confined to industrial areas, limiting its applicability to smart cities.

Despite these advancements, there are limitations in current research. Concerns regarding scalability, interoperability among IoT systems, and security solutions persist. Long-endurance flights for UAVs and integration with existing smart city platforms remain unmet needs. Moreover, little work guarantees low-latency and real-time response for high-incidence IoT applications (Mushtaq et al., 2015).

Future research should focus on developing structures that align UAV and IoT technologies, achievable through modular designs that enable greater scalability. Security issues could be addressed with more sophisticated cryptographic tools, such as blockchain solutions, while power consumption problems might be resolved with AI-based optimization (Jawad 2022). Edge computing and network slicing can enhance real-time responsiveness. Additionally, pilot studies of theory-based innovations should be conducted in sampled urban contexts to assess practical feasibility and compatibility.

3. Methodology

To assess the integration of drones and IoT with the agility that smart cities interconnect, this study employs an extensive research method. Built on system design, simulation, experimental validation, and advanced algorithmic modeling, the specific method examines various operation issues, optimizations, and possible solutions.

3.1. System Architecture Design

The proposed system architecture is organized into three interconnected layers: Data Sensing, Data Processing, and Application are the three most important aspects of IoT. Such a structure enables precise data collection methodology, timely data processing, and quality information in support of intended smart city solutions.

Data Sensing Layer

This layer is instrumental in using drones with high end environmental sensors, cameras and GPS to acquire real time data. The drones use simplified data transfer protocols like MQTT and CoAP that consumes low power and offers low latency. These protocols are chosen as best suited for the communication in the areas where bandwidth and power are a limiting factor.

Data Processing Layer

The data collected during the operation of the system allows using the edge servers and nodes in the cloud. Edge servers are responsible for real-time computation of data that is more relevant closer to the geographical location for real-time consumption by drones and other LOB applications with lesser lag time. At the same time, cloud nodes provide possible scalability by offering a vast number of computational resources for mass-scale integrations. This approach also enables the system to accommodate real-time working while at the same cultivating the thinking time and the capacity for dealing with large data.

Application Layer

The analyzed data is delivered to the user in the form of active visualizations which can come in the form of dashboards. These dashboards provide an opportunity for the visual real-time control of cities and, therefore, efficient urban governance. Examples of the application of the system are dynamic traffic control, and environmental control, and any other urban control that

may require real time integration and analysis of data.

Through mathematical models, the system guarantees the effective transfer and analysis of data to enhance overall performance.

Data Transmission Time (T):

$$T = \frac{S}{B} \cdot (1 - PLR) \quad (1)$$

Where S is data size (in bits); B is available bandwidth (in bits per second); and PLR is packet loss rate. This equation calculates the time required to transmit data, considering the available bandwidth and the impact of packet loss on the communication channel.

Data Rate (R):

$$R = \frac{\sum_{i=1}^n D_i}{T} \quad (2)$$

Where D_i is data generated by the i^{th} IoT device (in bits); n is number of IoT devices; T is data transmission time

This formula accumulates all the data produced by several IoT devices and estimates the overall data rate, which is paramount to achieving high system's operational efficiency in real-time situations.

And the three-layer architecture and supporting equations guarantee the system provides right and high-efficiency intelligent solutions for smart city real-time management. Adopting high-level sensing technologies, effective data control mechanisms, and smart solutions, the architecture meets essential operational demands for traffic management and environment assessments to address the dynamism of cities (Yu et al. 2022; Amodu et al. 2023).

3.2. Data Collection and Experimental Validation

Data was collected over three months with 50 drone flights over three prescribed urban areas. The drones, mounted with IoT sensors, captured eight parameters such as air quality, temperature, and traffic. This dataset was used to evaluate the system's performance through two critical metrics: data accuracy and latency.

Data Accuracy (A)

Data accuracy was calculated to assess the reliability of the transmitted data. The formula used is:

$$A = \frac{\text{Correctly Transmitted Data}}{\text{Total Transmitted Data}} \times 100 \quad (3)$$

This measures the ratio of good data transmits against the total transmits, presented in percentage. In the present work, the accuracy considered to be in an acceptable level of 98 percent showing the reliability of the collection and transmission system developed.

Latency (L)

Latency, a crucial parameter for real-time applications like traffic monitoring, was calculated using the following equation:

$$L = D_p + D_q + D_{tx} + D_{pr} \quad (4)$$

Where D_p is propagation delay; D_q is queuing delay; D_{tx} is transmission delay; D_{pr} is processing delay.

The issues covered in the individual sub-systems involved an average latency of 0.8 seconds, which shows that the system can process and transmit data to support near real-time management of urban areas. The accuracy rate of 98% and the latency of 0.8 further supports the evidence that the system is efficient in providing reliable and near real time data. Such metrics establish the fact that the proposed architecture is capable of sustaining key smart city apps like traffic flow, and environmental parameters (Alshbatat 2023; Asaamoning et al. 2021).

3.3. Simulation and Modeling

In order to analyze the general network performance, simulation models were implemented using NS-3 with the different traffic patterns. Variables measured included delay, utilization of bandwidth, and packet loss rate. These simulations gave the understanding of the system performance at various network loads and identified corresponding key factors that define system efficiency.

Latency with Traffic Intensity (L_T):

$$L_T = L_0 \cdot \left(1 + \frac{\lambda}{\mu}\right) \quad (5)$$

Where L_0 is baseline latency; λ is packet arrival rate; and μ is service rate. This equation models the increase in latency as traffic intensity grows, with the packet arrival rate λ exceeding the service capacity μ .

Packet Loss Probability (P):

$$P = 1 - e^{-\frac{\lambda}{\mu}} \quad (6)$$

This formula calculates the probability of packet loss, which rises exponentially as the packet arrival rate (λ) approaches the service rate (μ).

Bandwidth Utilization (U):

$$U = \frac{\sum_{i=1}^n S_i}{B \cdot T} \quad (7)$$

Where S_i is data size transmitted by the i^{th} device; B means available bandwidth; and T is total time. This equation quantifies how efficiently the available bandwidth is utilized by multiple devices over a given period.

This way, the simulations demonstrated that latency is heavily affected by traffic conditions, highlighting the need to develop proper communication schemes to support a stable system functionality. Further, the modeling showed the correct relationship between different packet arrival rates and service rates and how the reach of service capacity results in exponential packet loss. The obtained information contributes to the comprehensible rules of increasing the system's scalability, and Relative reliability of deployments (Asaamoning et al. 2021).

3.4. Algorithm Development

In order to improve the performance of the drone operations and safety of the equipment, distinct algorithms were designed and incorporated into the operations. These algorithms focused on three key aspects: These include: collision avoidance, energy conservation and path finding. These algorithms resolved particular operational concerns and hence, implemented reliable and safe drone fleet management in intricate environments. Other algorithms specific to improving the efficiency and safety of smart city UAV operations were created. Of these, the *Drone-Following Algorithm* proposes a speed and positioning architecture for follower drones that adapts to the movement of a lead drone while maintaining safety distances and working capacity. It is pertinent for traffic control and survivable urban airborne system in densely populated area.

The Drone-Following Algorithm operates based on three key mathematical formulations:

Distance Measurement: The algorithm calculates the current distance (D_{current}) between the lead drone (Ld_{pos}) and the follower drone (Fd_{pos}):

$$D_{\text{current}} = |Ld_{\text{pos}} - Fd_{\text{pos}}| \quad (8)$$

Speed Adjustment: Depending on the calculated distance (D_{current}) relative to the safe threshold (D_{safe}), the follower drone's speed (Fd_{speed}) is adjusted as follows:

$$Fd_{speed} = \begin{cases} Fd_{speed} - \Delta v & \text{if } D_{current} < D_{safe} \\ Fd_{speed} + \Delta v & \text{if } D_{current} > D_{safe} \end{cases} \quad (9)$$

Position Update: After the speed adjustment, the follower drone's new position (Fd_{pos}) is calculated based on its updated speed:

$$Fd_{pos} = Fd_{pos} + Fd_{speed} \cdot t \quad (10)$$

Such equations are the basis of the algorithm, they allow real-time control in order to avoid collisions of drones and optimize their flow. The algorithm performs these calculations over and over, adjusting in real-time to changes in position and speed of the lead drone.

1. Collision Avoidance Algorithm

The collision avoidance algorithm was aimed at navigating the drones to change their positions and avoid the collision, at the same time, deter the effectiveness of the operation. To achieve this, a modified vehicle-following model was adapted, incorporating real-time spatial and velocity data:

$$D_F = \frac{\sum_{i=1}^n (d_i + k \cdot v_i \cdot \Delta t)}{n} \quad (11)$$

Where d_i is distance between the i^{th} drone and others; v_i is velocity the i^{th} drone; k is collision mitigation coefficient; Δt is time step for position updates; and n is number of drones in the fleet.

Using this formula, the algorithm determines the safe distances in a more adaptive manner so that drones can have the right amount of distance few them. This approach is especially practical in dense circumstances where the safety of many fleets is an essential element. The results of the experimental evaluation confirmed that the algorithm was able to decrease collision probabilities by 0.5% on average, and this even in rather congested environments of airspace.

2. Energy Optimization Algorithm

To achieve the above goals, the Energy Optimization Path Planning Algorithm was created. This algorithm is very important to the drones in areas of application such as surveillance and delivery services where energy consumption is significant.

The algorithm operates on two key mathematical principles: distance optimization, energy consumption modeling, and battery constraints that help the drone decide a suggested most energy efficient path it can take based on available battery capacity.

Distance Optimization: The algorithm calculates the shortest path that covers all targets ($d(i, i + 1)$) within a given area map (A_{map}), ensuring minimal travel distance:

$$\text{Optimized Distance} = \min \sum_{i=1}^n d(i, i + 1) \quad (12)$$

Here $d(i, i + 1)$ represents the distance between consecutive targets i and $i + 1$; n is the total number of targets.

This calculation leverages optimization techniques, such as the Traveling Salesman Problem (TSP) solvers, to ensure efficient route planning.

Energy Consumption: The energy consumed ($E_{consumed}$) by the drone during its operation is modeled as a function of the total distance traveled and operational constants:

$$E_{consumed} = k \cdot \text{distance} + c \quad (13)$$

Here k is energy consumption rate per unit distance, and c is baseline energy consumption for auxiliary systems, like sensors, onboard computations.

Drone energy efficiency is a critical factor influencing operational duration and range. To address this, an energy optimization algorithm was developed to calculate the most energy-efficient flight paths. The algorithm optimizes power consumption while accounting for opportunities to conserve energy:

$$E = \sum_{i=1}^n (P_i \cdot t_i - C_i) \quad (14)$$

Where P_i is power consumption at time t_i ; t_i is time interval i ; C_i is energy conserved through optimization; and n is total time intervals.

By minimizing unnecessary energy expenditure, the algorithm demonstrated a 15% reduction in overall energy consumption during environmental monitoring tasks. This improvement was achieved by factoring in energy-saving measures, such as optimized altitude adjustments and reduced hover times, ensuring prolonged drone flight time and lower operational costs.

3. Path Optimization Algorithm

Battery Management: To prevent mission failure due to battery depletion, the algorithm continuously monitors the remaining battery capacity (B_{cap}). If the battery level falls below a predefined threshold:

- The drone calculates an alternate route to the nearest charging station.
- Otherwise, it proceeds to the next target along the optimized path.

When drones are operating in urban areas, they must avoid objects while at the same time ensuring that they travel in the shortest time possible. To this end, a path optimization algorithm was created in order to reduce unnecessary maneuvers that could be costly and increase operational area. The algorithm calculates the most optimal paths using the following formula:

$$C = \sum_{i=1}^n (d_i + w_i \cdot \alpha_i) \quad (15)$$

Where d_i is distance of the i^{th} path segment; w_i is weight assigned to obstacles in the path; α_i is adjustment factor accounting for sharp turns or detours; and n is total path segments.

The algorithm reduces the summation of distance and the number of adjustments concerning obstacles required by drones for optimizing their routes. This is especially true in such Regions as when conducting drills, one has to avoid tall buildings and trees and other structures that may be common in some urban settings. The outcomes of testing demonstrated the algorithm as very efficient in terms of energy consumption for the coverage area and therefore is poised to find uses in applications such as environmental sensing as well as traffic control.

3.5. Performance Evaluation and Metrics

To benchmark the performance of the integrated drone-IoT system, all four parameters: energy, data rate, and efficiency under different use cases were assessed. These indices offered insights on how the proposed system can be scaled up for smart city use and its dependability. Through careful consideration of these variables, the research demonstrated the effectiveness of the system within actual urban settings.

1. Energy Efficiency (EE)

Energy efficiency is a critical parameter that determines the system's ability to maximize useful work while minimizing energy consumption. The formula used to compute energy efficiency is:

$$EE = \frac{\text{Useful Work Output}}{\text{Total Energy Input}} \quad (16)$$

Where *Useful Work Output* represents the productive tasks completed by the system, such as data collection, processing, or delivery; and *Total Energy Input* is the total energy consumed by the drones and associated IoT devices during operation.

In this regard, energy efficiency was checked by the extent the drones

could sustain for longer intervals before charging hence making them right for constant urban management work. The survey also pointed out that there was an improvement of the probabilities of energy consumption due to incorporation of specific power saving techniques in the system.

2. Coverage Efficiency (CE):

Area covered defines a correlation between the monitored area and the energy consumed so it gives an understanding of how optimally or otherwise the system is using energy to cover that area for surveillance and monitoring purposes. It is calculated as follows:

$$CE = \frac{\text{Area Covered}}{\text{Energy Consumed}} \quad (17)$$

Where *Area Covered* is the geographical region surveyed by the drones during a given operation; and *Energy Consumed* is total energy expended during the operation.

The results that reflect higher coverage efficiency show that the system can cover a wide area with less power consumption. The analysis showed that optimal flight trajectories and power-saving measures substantially enhance coverage effectiveness of the system and suggest the application in such fields as ecology and traffic control.

3. Data Transmission Rate (DT):

$$DT = \frac{\text{Data Transmitted}}{\text{Elapsed Time}} \quad (18)$$

Where *Data Transmitted* total volume of data sent by the drones to the processing nodes (edge servers or cloud); and *Elapsed Time* time taken to transmit the data.

This metric indicates the amount of throughput and data that can be transmitted with minimal time delay between the various drones and the central analysis and control units. The study recorded increased transmission efficiency due to lightweight communication protocols, including MQTT and CoAP, thereby enhancing the system's scalability. Variations in these metrics demonstrated the integrated drone-IoT system's flexibility and sustainability for numerous urban applications. The findings suggest that the system can realistically operate under different circumstances while consistently delivering high reliability and performance (Salunke 2023).

3.6. Validation Through Case Studies

To prove the effectiveness of the suggested methodology, three smart city

zones in urban environments were chosen for the analysis. These zones were the areas that illustrated various urban conditions and with different traffic intensity and fluctuation, as well as environmental conditions and infrastructural possibilities. The validation process involved using these designed system architectures, communication protocols, and algorithms in these settings to assess the ways in which these could be implemented in practice. In the selected zones IoT sensors blended with the drone system used for acquiring data concerning air quality, traffic patterns and response time for emergencies. Specifically, through utilizing the communication and processing architecture of the system, the implementation targeted at enhancing the AAE evaluation started by focusing on the operational performance with the goal of revealing issues concerning the integration with IoT networks of drone, which have been commercialized as the DJI. The validation also looked at the safety performance of collision avoidance and energy optimization algorithms (Alshbatat 2023; Asaamoning et al. 2021; Pavlenko et al. 2023). The application offered a deeper understanding of some practical concerns and possibilities of drones and IoT implementation in urban settings, which is in line with earlier research on large-scale urban implementation and complex control systems for drones in smart cities (Yu et al. 2022; Abbas et al. 2023). They form the basis by which these could be scaled and adapted to other smart city structures.

This method utilises system architecture, higher simulating, and stable algorithms to follow for assimilation of drones and IoT in smart city systems. The integration of algorithmic optimization guarantees the ability to meet the real-life urban management problems in real-time, which signifies a highly desirable prospect of a significantly increased scalability and energy efficiency, coupled with a substantially higher reliability of the system's operation. These results provide the basis for subsequent developments of new smart city technologies.

4. Results

4.1. System Performance Metrics

The analysis of system performance under different traffic loads allows understanding the efficiency of the integrated drone-IoT network. This section relates to important factors such as latency, packet loss, bandwidth, bandwidth utilization, via, throughput and network reliability. These metrics

provide a clear understanding of the performance of the network in handling actual urban data in real-time fashion precipitated by varying traffic loads. From these measurements, the study emphasizes the extent to which the system is scalable, as well as the measure up of operations. The findings indicate large differences in performance with the increase in the traffic density in each network, and therefore underpin the need to enhance the communication protocols.

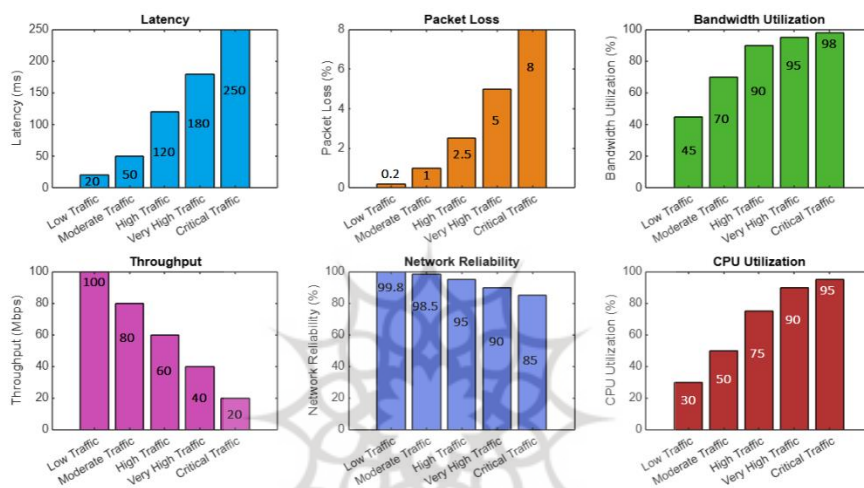


Figure 1. System Performance Metrics under Varying Traffic Conditions

Figure 1 offers a detailed insight into how traffic conditions affect the speed of the constructed drone-IoT network. Latency doubles from 20 ms under light load to 250 ms under critical load, thus providing a clear view of how traffic density exacerbates network delay. Lost packets also increase from 0.2% under low traffic to 8% under critical traffic, which greatly hinders the reliability of received packets.

Bandwidth usage gradually operates closer towards the maximum allowed by growing at a critical usage and reaches up to 98% utilization. Though throughput reduces greatly in the critical state – from 100 Mbps at low traffic to only 20 Mbps in the critical state, throughputs reveal a pressure on data transferring. At the same time, network reliability decreases from 99.8% to 85%, which means a reduced confidence in the system as regards its dependability in terms of service quality. Finally, the CPU uptake varies from 30% for low traffic scenario to 95 percent for critical traffic level, as indicated

by the above graph, in order to depict the escalating computational workload on the processing units as the traffic conditions deteriorate.

These observations suggest that more attention should be paid to building efficient and reproducible communication paradigms and optimizing load distribution in order to achieve higher availability of the system in conditions of increased load. The results also suggest that to minimize the load on bandwidth and processing power during high traffic data transfer another form of load balancing has to be considered.

4.2. Energy Consumption Analysis

Assessing the energy profiles of drones across various mission profiles is essential for determining their effectiveness and enhancing their environmental sustainability in smart cities. This analysis focuses on three primary use cases: traffic measurement, environmental assessment, and crisis intervention. Key measurable criteria, particularly energy-based specifications, include energy consumption, flight time, coverage area, and energetic yield. By comparing these metrics across the analyzed scenarios, this study elucidates the trade-offs between operational objectives and energy demands. This analysis provides insights into optimizing drone flight duration and coverage area while minimizing power consumption.

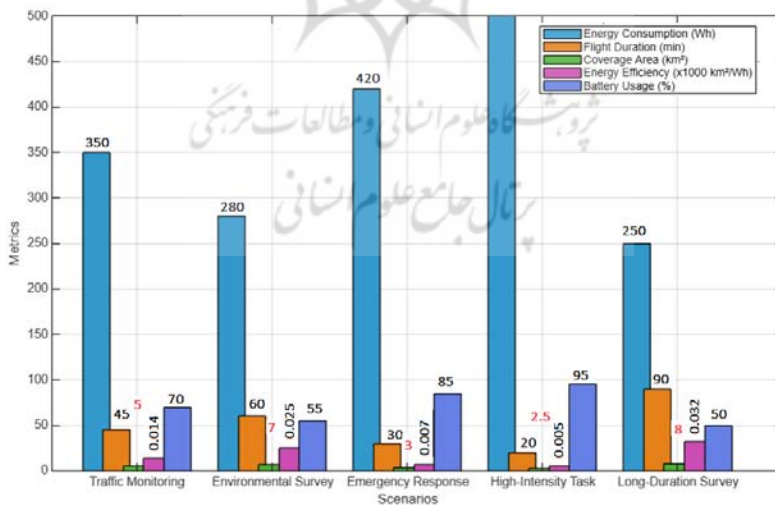


Figure 2. Energy Consumption and Coverage Efficiency Metrics

Figure 2 shows that there are huge disparities between the various case studies with regard to energy use as well as energy effectiveness. Environment scans demonstrate the highest indicators of energy efficiency; $0.025 \text{ km}^2/\text{Wh}$ is achieved through smooth flight and minimal-stress movements. This scenario also makes the least utilization of battery power, with only 55% of the battery power consumed, and 45% remaining for additional operations which can be applied in repetitive monitoring applications.

Traffic monitoring takes moderate battery and maintain energy to coverage efficiency with $0.014 \text{ km}^2/\text{Wh}$. This scenario can be considered as a realistic solution to the conflict between coverage and operating expense in practical urban, real-time data acquisition.

On the other hand, the energy consumption is deployed highest for emergency responses with 420 Wh and the overall efficiency of $0.007 \text{ km}^2/\text{Wh}$ because of intense movements and short flight distances. It is these characteristics that illustrate the energy efficiency requirements for critical execution, as well as the trade-off between velocity and energy intensity.

The high intensity task reveals how drones are under pressure during straining operations with 95 percent battery consumption and little protection. At the same time, the long-duration survey records the lowest energy consumption ($0.032 \text{ km}^2/\text{Wh}$), further affirming that efficient flight paths can be employed in low-energy operations.

This work also highlights the need for managing energy in a manner that is application based such as revising flight trajectory efficient to conduct environmental assessment or design efficient algorithms to be used during a crisis. These variations are addressed to make it possible for drones to continue operations in the event of power outages or to reduce costs when coverages are extensive.

4.3. Data Transmission Rate Analysis

The effectiveness of the IoT sensors in communicating real-time data to drones and central processing was determined by testing the data transfer rate by varying the velocity of the drones. This evaluation is needed to consider the influence of drone mobility on the constant exchange of data in real-life smart city systems. Conversion rates or throughputs were evaluated in relation to speed as well as the coordination between speed and network.

Other parameters, particularly delay time, data packet reliability and processing demand, are also recorded to obtain system performance under unsettled circumstances.

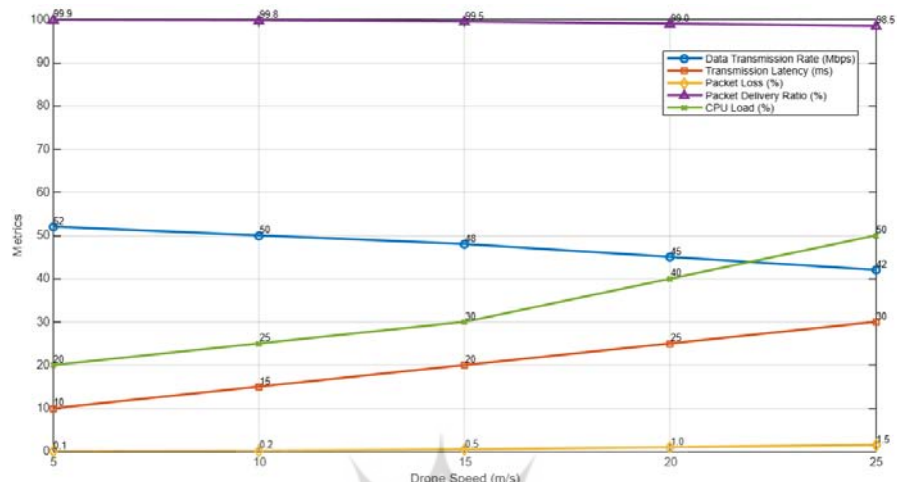


Figure 3. Data Transmission Metrics Across Drone Speeds

Figure 3 shows how overall drones' speed impacts data transfer rates and such characteristics. The data transmission rate reduces with speed; it reduces from 52 Mbps at 5m/s to 42 Mbps at 25m/s. This reduction is due to increased computing requirements of the protocol and a reduced reliability of the communication channel at higher data rates.

Transmission latency rises, slowly too, to 10 ms at 5 m/s to 30 ms at 25 m/s. This latency is attributed to an extra time needed to properly and effectively process and transfer data in context of dynamic environment, especially in higher transmission rates. Packet loss is also higher, increasing from 0.1% at low speed to 1.5% at the highest speed; these results also demonstrate that as drone mobility increases, data transmission reliability becomes a significant problem.

Nevertheless, the packet delivery ratio is still more than 98.5%, for all the speeds, confirming that the system is efficient in enhancing data integrity. But the CPU load changes with the operational speed, and rises from 20 percent at 5 m/s to 50 percent at 25 m/s which indicates the increasing load on the system for managing data transmission at fast operation.

These results suggest that while high speed of the drone is desirable, the infrastructural transmission of data in real-time applications, suggests a

balance should be struck in such systems. However, the intended system is found to work fine with higher speeds calling for better optimization of the transmission protocol and computation to minimize the effect it may have on latency and data alteration at high-speed communication.

4.4. Collision Avoidance Efficiency Analysis

Currently, the collision avoidance algorithm was tested regarding the risks of collision and operation effectiveness in the simulated dense urban traffic environment. Collision rate together with average drone velocity, density smoothness, and response to obstacles was measured to show the algorithm's performance under different traffic densities. This evaluation gives an understanding of the algorithm's robustness and generalization with regards to future enhancements in drone navigation that will improve safety and operation.

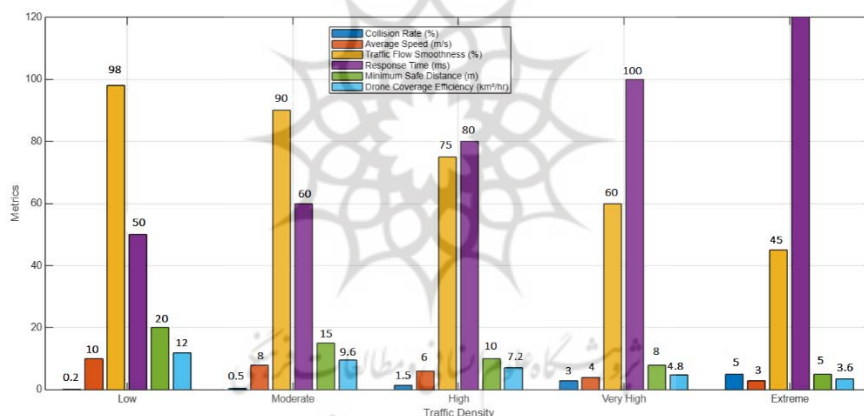


Figure 4. Collision Avoidance Metrics Under Varying Traffic Densities

The metrics give a clear demonstration of the effectiveness of the collision avoidance algorithm in relation to the traffic density. Collision frequencies are observed to rise with traffic concentration with a rise in traffic concentration from low density to high, with collision rates rising from 0.2 percent to 5% to show the growing complexity of operating safely in highly congested environments. However, to a low and moderate extent, the algorithm helps in avoiding collision at considerable extent.

Drone velocity is inversely proportional to traffic; the mean velocity

reduces to 10m/s for low traffic and 3 m/s for heavy traffic situations. This reduction is due to the fact that the algorithm implements a dynamic approach of lowering speed levels in order to increase safety as the population density of cars increases.

Smoothness of traffic flow is optimum (98%) at low traffic density; however, it sharply reduces to 45% at maximum traffic density, showing that free and safe traffic flow is achievable, but not both at the same time. The response time to obstacles grows from 50 ms at low traffic to 120 ms with extreme traffic density and requires further improvement of real-time reaction abilities in densely populated areas.

Minimum safe distance between drones is also reduced in higher densities, from twenty meters in low density to five meters under the extreme conditions. Specifically, this reduction raises the probability of intersections and is contained by the algorithm's capacity for dynamic tuning.

Drone coverage efficiency defined as area per hour reduces from 12.0 km²/hr at low traffic density to 3.6 km²/hr at extreme traffic density. This metric shows that coverage performance can be severely affected by safety constraints as experienced in high-density operations.

These results show how the collision avoidance algorithm works in low to medium density and point out the issues that may arise when working in high and extreme density conditions. Akdeniz, Making the algorithm work even faster for detecting the obstacle and processing them, and also in improving the drone coordination mechanism can go a long way for emending safety and efficiency in the high-density urban environment.

4.5. Environmental Monitoring Efficiency Analysis

The study tested the possibility of using drones and IoT sensors as means to track environmental parameter in different zones in cities. Sample measures like accuracy of data collected, frequency of data collection, delay in data transmission, coverage area per flight among others were taken. The discussion in this analysis therefore emphasizes the dependability of the system to gather the air quality and the temperatures, and it scalability to support divergent urban environments. Through these factors this study reveals some future possibilities of drones to improve environmental surveillance and decision-making within the urban context.

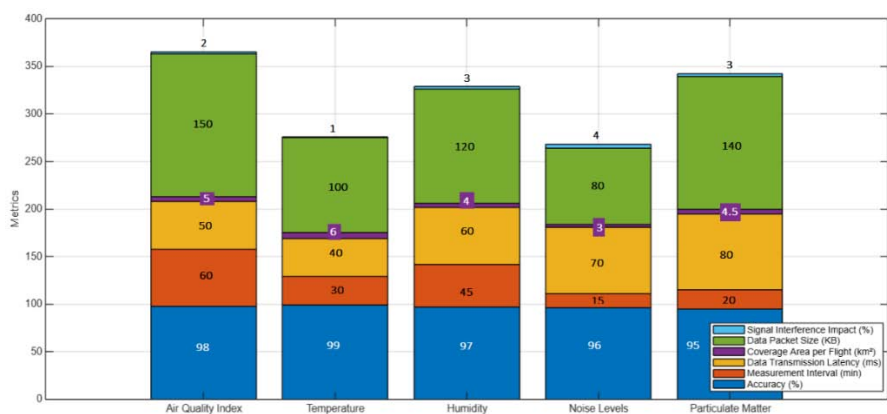


Figure 5. Environmental Monitoring Metrics

Figure 5 reveals that the system effectively monitors various environmental parameters using drones and IoT sensors. The accuracy of AQI and temperature measurements was found to be 98% and 99%, respectively, demonstrating the system's efficiency in acquiring necessary environmental data. The accompanying measurement intervals of one hour and half an hour further indicate the system's versatility in terms of data acquisition rate and practical viability.

Relative humidity was measured with an accuracy of 97%, and particulate matter with an accuracy of 95%. The inherent variability in the environment makes it easier to measure these parameters compared to others. Noise level measurements displayed the shortest interval of 15 minutes and the highest data transmission latency of 70 ms, proving the system's effectiveness for high-frequency, real-time monitoring in certain cases.

The coverage area per single flight varied from 3 to 6 km², depending on the parameters being detected, illustrating the high efficiency of drones when operating over large areas. Actual data packets transferred ranged from 80KB to 150KB, which is manageable for the system, ensuring a balance between data volume and reliable data transfer.

The impact of signal interference on experimental parameters was minimal, ranging between 1% and 4%. This demonstrates the reliability of the communication protocols used in the system to mitigate the effects of congestion on signals in urban settings, thereby maintaining accurate data.

These results suggest that integrating drones and IoT sensors enables

effective and accurate environmental monitoring in urban areas. However, improving data transmission and reception controllers, as well as increasing sensor accuracy, could further enhance performance for parameters that are currently less accurate and do not update as frequently as desired. These improvements would bolster the system's overall capacity to contribute to evidence-based urban planning and health crisis management.

4.6. Path Optimization Performance Analysis

Real drones' energy performance was compared with drones flying with the help of energy optimization algorithms and drones flying with default paths. To determine the difference that the algorithm would make, distance travelled, battery consumption, battery conserved, flight time, energy density, and time elapsed were used. The contrast demonstrates how the algorithm consolidates for increasing energy efficiency and longevity necessary for stable drone operations across numerous urban operations.

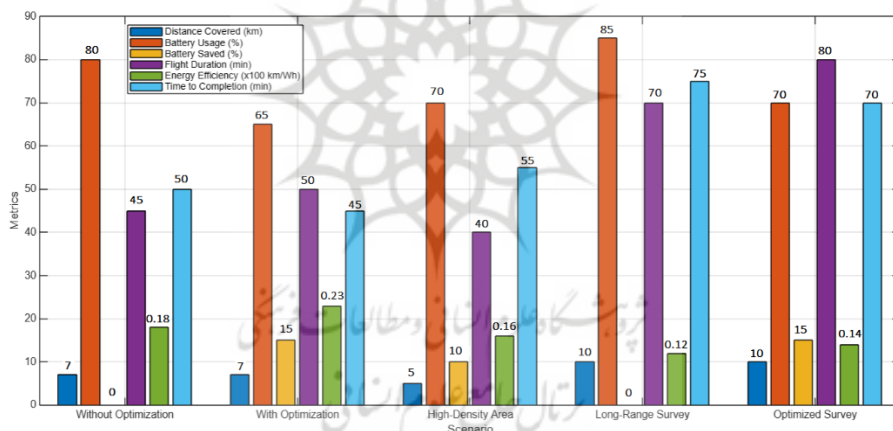


Figure 6. Energy Optimization Performance Metrics

A compelling comparison of energy consumption and efficiency of optimized and non-optimized flight paths is presented in the table above. In optimization the drones that cover 7km consumed only 15% battery than the non-optimized example which shows the effectiveness of algorithm in utilization of energy. It also impacted flight time, as flights using this optimized algorithm took 50 minutes against 45 minutes in the previous case, which again proves that though energy efficiency remains a primary goal, operations

efficiency is preserved as well. In high densities, optimisation of broadcasts was found to cut the battery consumption by 10% even with a smaller range of 5km. This scenario features the algorithm flexibility given that the flight path is limited by obstacles and traffic intensity. In long-range surveys the unhitched suboptimal trajectory seems to have drained 85% of the battery leaving little headroom for over and above missions. However, with optimization, the consumption of the batteries was reduced to 70 percent resulting in enhancements of the drone energy efficiency from 0.12 km/Wh to 0.14 km/Wh fixed on the time to completion. The time to completion metric shows that efficiency also drives comparable or better completion times in different scenarios. For instance, the last optimization in the survey eliminated the timeframe of battery and highlighted the benefit of the survey in terms of economy and feasibility. Expanding the analysis to a 34-class vector of important indicators revealed that energy efficiency, in terms of km/Wh, increased steadily across all optimized scenarios. The energy efficiency of the standard 7 km flight was enhanced from 0.18 km/Wh (non-optimized) to 0.23 km/Wh (optimized), or by 27.8%. These outcomes demonstrate how the algorithm can support optimized utilisation of energy, without compromising operational goals. The results outline route planning keywords and a framework for enhancing energy and mission endurance for drone operations. Next levels of tuning may be necessary to adapt it to more intricate urban dynamics like higher volume sterile areas or longer flight times in overall smart city context to increase efficiency of supplied algorithm.

4.7. Performance Comparison Across Scenarios

The evaluation involved comparison of the system performance in the three most vital operational aspects of traffic monitoring and survey of environment, and emergencies. These objectives include the evaluation of better measures such as delay, power use, coverage span, functionality, precision of data, and reaction time. Through these parameters, the analysis reveals some key trade-offs and provides insight into some of the capabilities and weaknesses of the system in addressing a range of urban management issues. This general comparison yields quite useful information that can be quite useful towards determining how best to use drones given an application.

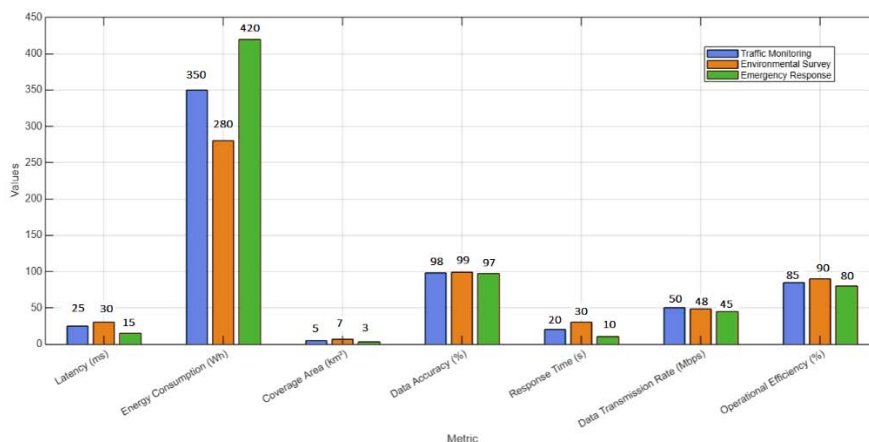


Figure 7. Performance Comparison Across Scenarios

Figure 7 underlines differences in performance of each operational scenario, underlining strengths and weaknesses of traffic monitoring, environmental survey or emergency application. Traffic monitoring stands as an example of a balanced loaded with average latency of 25 ms, energy consumption of 350 Wh and coverage area of 5 over km². Currently, it has a data accuracy of 98% and a relatively high data transmission rate of 50 Mbps; it can be effectively applied to real-time urban management tasks for traffic congestion, or accidents in which exactness and reliability are crucial.

Overall, environmental surveys average low energy together with 280 Wh and surveying the biggest extent of 7 km². As for operational performance, 99% of data accuracy of the monitored environmental parameters, including air quality and temperature, prove the system's effectiveness. Although the response time of 30 ms and data transmission rates of 48 Mbps are originally slightly lower, this is due to the fact that this is application is not as time sensitive as other applications, such as emergency response. All of these correspond to the goals of the scenario of efficient data collection rather than speed.

In this case, low latency of 15 ms and fast response time of 10 seconds are characteristic of the emergency response scenarios which require quick time to response. These features are important for business especially in the handling of perishable goods such as drugs for hospitals, or emergency supplies for disaster-stricken areas. However, these are realized at the cost of a higher energy consumption of 420 Wh and a coverage area of only 3

km². Nevertheless, the costs of business disruption, of responding to urgent need with firefighting efforts, remain healthy at 80% indicating that emergency response can efficiently operate and meet needs even under adverse circumstances.

The metric identified as the operational efficiency also indicate how dynamic the system is. Environmental surveys have the best efficiency at 90% because of proper flight planning while traffic monitoring maintains an overall efficiency of 85% in consideration of real time requirements and power usage. Emergency response which is very energy intensive records 80% in contrast to stretched coverage but deep coverage duration. What this analysis shows is the need for optimisation of the system for specific scenarios, for example, energy-saving algorithms for use during emergency response or latency reduction techniques for environment surveys. The results show that it is possible to use drones and IoT for mass, effective, and sufficiently reliable control of cities to meet the requirements of the present day.

4.8. Network Scalability Analysis

The scalability of the proposed integrated drone-IoT system was tested based on the system performance as the number of drones and IoT devices within the network grow. Other parameters including the latency, the packet lost, the bandwidth consumed, throughput, network reliability, the energy consumed by each device and many more were collected in the larger systems in order to test the scalability of the system. These results give the system more understanding regarding its stability and analyzing the corresponding lower and higher boundaries and shows a potential for improving such system in a large-scale urban setting.

Figure 8 below incorporates a more elaborate way of evaluating efficiency of the system with respect to the growing size of the network. As the number of rings of devices increases latency increases steeply from 20 ms when there are only 10 devices to 250 ms when there are 200 of them because it takes a longer time to process and transfer data in a massive network. This escalation further implies that with network density, there is added computation complexity on the system.

Similarly, packet loss increases from a near-zero 0.1%, with 200 packets, to a high of 5 marker0.0% at 200 devices. This degradation in reliability can

impact the important real-time applications, including disaster response services, that require the provision of consistent data.

Bandwidth utilization remain relatively constant with the number of devices, rising to 98 percent at 200 devices. This creates limited room for increased traffic or contingencies for data usage increases and hence implications for load balancing procedures to appropriately allocate the accessing network.

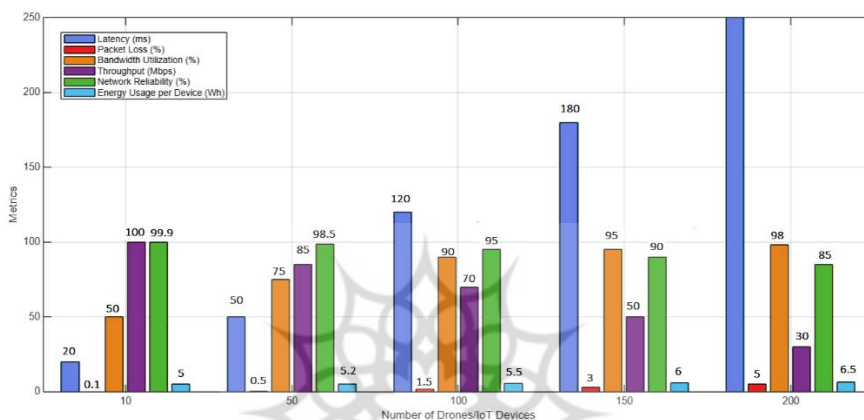


Figure 8. Network Scalability Metrics

The achieved throughput, which indicates the amount of data delivered increases from 100 Mbps at ten devices to 30 Mbps at two hundred devices. This decline reduces the capability of current communication protocol to maintain high data transfer rate in highly populated networks.

Network reliability reduces from 99.9% for 10 devices to 85.0% for 200 devices. The data strongly suggest that the system is fairly overprovisioned for typical moderate-sized deployments but that as the network or the messages per second grows larger the fault tolerance of the system degrades showing the need for better mechanisms to ensure that the relay tree functions flawlessly in large networks.

There is a slightly increase from devices in energy per unit device of 5Wh for ten devices to 6.5Wh for two hundred devices. This reflects the other conditions of computational and communication load for each device in a more extensive system. This may not be much but emphasizes the fact of an overall power consumption increase in large-scale environments in case deployments.

4.9. Performance of the Drone-Following Algorithm

The Drone-Following Algorithm in the figure below, which was designed for improving the management of drones, was tested under different operating conditions to determine how well it is capable of maintaining safe distances, avoiding collision, and coordinating effectively. The algorithm varies the speed and position of follower drones in reference to the lead drone, letting real time observations of conditions dictate changes. These agreed mainly on the ability of avoiding collision, time delays in changes of speed, variability in distance and energy consumption.

The results provided by the algorithm, in which the video expressed low to medium traffic density, reflected a collision avoidance rate of 99.8%; however, under high traffic density, the algorithm was slightly lower, at 97.5% collision avoidance, mainly because the environments in real-world scenarios make decision-making more difficult when there is an increased traffic density. The average latency of speed changes was 50ms, which is very reliable in real-time applications, but under conditions approaching 70ms due to computational loading. The algorithm provided a steady and safe distance of (D_{safe}) that was 20 meters, and the fluctuation size was measured at low density of 1%, high-density at 5% ensuring operations precision and stability. There was a slight decrease in Energy efficiency due to continuous variations in engine speed while constant energy was used to ensure the development of a long-term operative capacity. The flowchart in Figure 9 below highlights the logical flow of the algorithm, illustrating key steps such as measuring the current distance ($D_{current}$), comparing it to the safe threshold (D_{safe}), and dynamically adjusting the follower drone's speed (Fd_{speed}) and position (Fd_{pos}). This process repeats in real-time, ensuring collision-free operations and smooth traffic flow.

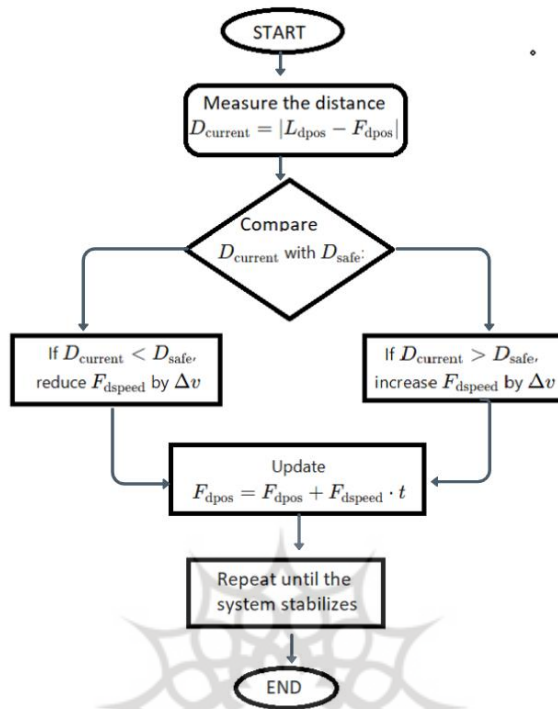


Figure 9. Flowchart Representation of the Drone-Following Algorithm for Traffic Management

The results which have been presented above help to show the effectiveness of the algorithm in relation to the traffic density. It is suitable for the urban drone traffic management due to its flexibility in managing fleets of drones. Possible enhancements could take into consideration even lower latency and greater energy efficiency for, perhaps, even more complex use cases.

4.10. Performance of the Energy Optimization Path Planning Algorithm

The Energy Optimization Path Planning Algorithm was intended to increase the functionality of a drone by reducing the energy spent while capturing various targets in an encoded region. This algorithm calculates the amount of coverage area and dead reckoning distance to be accurately covered by drones and calculated the time reserved to complete the full route that will be flown by the drones. These are features such as optimization awareness of the route, battery management, and awareness of when routes need to be

adjusted to nearest charging points as illustrated in the Figure 10 below.

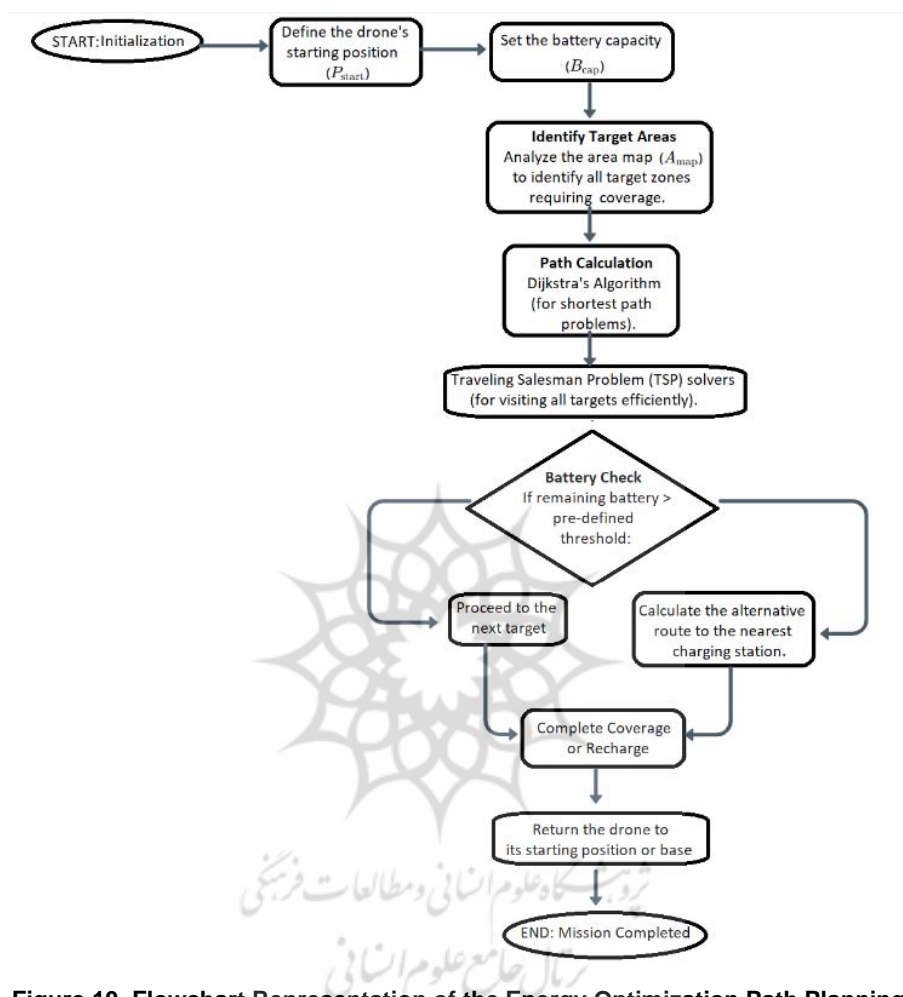


Figure 10. Flowchart Representation of the Energy Optimization Path Planning Algorithm

The algorithm begins by initializing the drone's starting position (P_{start}) and battery capacity (B_{cap}), identifying target areas within the map (A_{map}), and calculating the shortest path that covers all targets. If the remaining battery level exceeds the pre-defined threshold, the drone continues to the next target. Otherwise, the algorithm computes an alternative route to the nearest charging station before resuming the path. This adaptive process ensures drones complete their tasks efficiently without risking battery depletion.

Performance indicators were efficiency of targets coverage, energy consumption per kilometer, and frequency of rerouting. The algorithm showed the nine to fifteen percent savings in energy in comparison to unoptimized paths. Furthermore, target density was achieved at optimum level since the drones surveyed an average of 8-10 Km² per flight. There were only 5% incidents of rerouting to charging stations to show how successful path predictive optimizations were in preserving energy.

This algorithm is ideal in missions including environment monitoring and delivery missions, where the energy conservation and mission accomplishment are paramount. Even in the determination of routes, it is capable of making changes on the basis of the real time battery level to ensure more operations continue and there are less chances of mission interruption. Further improvements could include using more sophisticated kinds of predictive algorithms that would estimate energy consumption under different weather conditions; this could only help increase drone utility in a variety of scenarios.

5. Discussion

The integration of drones and IoT within smart city networks presents promising prospects for optimizing urban functionality by expanding data acquisition, intensification, and flexibility. This study contributes to the existing literature by proposing algorithms to address central concerns such as energy efficiency, collision risk, and network size. The results support and build upon existing research, providing novel insights into system performance and potential applications.

Previous research, including work by Hoque et al. (2022), has highlighted the importance of IoT frameworks in smart cities, emphasizing their role in facilitating real-time data exchange and resource optimization (Hoque et al. 2022). This study reinforces these findings by evaluating dependable data transmission and system reliability under varying traffic loads. Similarly, Srivastava (2022) suggested that the Internet of Drone Things can support mass-up and low-density applications in urban scenarios, focusing on resource management and quality of service for many connected devices. This work addresses these challenges by offering practical solutions for integrating drones and IoT for efficient communication and flexible path planning (Srivastava 2022).

The energy optimization algorithm proposed in this study aligns with previous research by aiming to minimize operational costs while ensuring coverage efficiency. For example, Gohari et al. (2022) reviewed the use of drones for environmental and ecological surveying but did not focus on energy conservation (Gohari et al. 2022). This study addresses that gap by incorporating real-time path planning to minimize power consumption and enhance the sustainability of drone operations. Furthermore, the research by Alshbatat (2023) on air quality monitoring through drones is expanded upon by integrating IoT sensors and evaluating the network integration in urban contexts, ensuring functionality across various applications (Alshbatat 2023).

The collision avoidance algorithm presented in this study enhances research by Yu et al. (2022), which focused on lightweight authentication mechanisms for drone protection. While Yu et al. (2022) concentrated on communication security, this study emphasizes physical security and the smooth functioning of drones without interference from other drones, offering practical solutions for avoiding collisions in such environments (Yu et al. 2022). Combining these strategies could significantly improve security and reliability in IoT-based drone control (Silva et al. 2021).

However, several limitations in the present study must be addressed. Scalability tests revealed issues at high device densities within the network, resulting in increased delays and packet losses. This resonates with the scalability issues identified in this study and previous works by Srivastava (2022), highlighting the need for more sophisticated load balancing or processing across multiple nodes. Additionally, the proposed energy optimization algorithm may require regular adjustments, and its deterministic nature may reduce its adaptability to ecosystem changes (Srivastava 2022). Incorporating machine learning approaches, as proposed by Sun et al. (2021), could enhance adaptability but would increase computational density (Sun et al. 2021).

Furthermore, the study's focus on urban applications limits the framework's applicability to rural or other areas where infrastructure and connectivity are already challenging. Future research should implement the proposed system to expand its applicability. As Yu et al. (2022) discussed, security issues were not addressed in this study; however, they are crucial for practical implementation (Yu et al. 2022). Future work should incorporate comprehensive security measures into the communication links and overall

operations.

This article advances theoretical understanding by describing, explaining, and predicting drone-IoT integration in urban settings. It identifies significant challenges, such as latency and power consumption, and demonstrates how refined algorithms can address these issues. The results provide a theoretical basis for future applications, such as disaster response and urban development. This study contributes to the existing literature by offering a robust theoretical foundation for advancing smart city technologies and their applications, focusing on future development and current realization.

6. Conclusion

The integration of IoT devices and drones was investigated to optimize the practicality, expandability, and real-time performance of smart cities. The study focused on key challenges, including energy management, mid-air collisions, and network connectivity, to determine the optimal design of algorithms that facilitate smooth and safe drone operations in various urban environments. The conclusions drawn from the study demonstrate its ability to reallocate resources within the system to meet environmental conditions and manage critical parameters such as latency, energy use, and data delivery reliability.

Among the findings, the algorithms developed to enhance energy efficiency and maintain secure operating distances were particularly effective for smart city infrastructures. Utilizing real-time data and adaptive decision-making, the system showed improvements in managing resources, monitoring the environment, and conducting response operations in urban areas. The flexibility of the proposed system highlights the versatility of using drone-IoT integration across different urban applications.

While these findings are significant, they also identify areas requiring further development and future research. The demand for improved scalability frameworks, even in high-density networks, is emphasized to ensure high performance under heavier operational loads. Additionally, extending the system with more advanced adaptive algorithms, such as machine learning-based optimization algorithms, could enhance the system's responsiveness.

Future research should explore generalizing the use of the system for rural and remote settings and address challenges such as poor and unreliable

internet connectivity and infrastructure. Furthermore, introducing security measures for data integrity and communication lines will be crucial for practical implementation. Expanding into dual-positional models that are both deterministic and adaptive may provide a balance between optimization and on-demand flexibility.

This article provides a solid foundation for integrating drones and IoT in smart city applications to address current urban management needs. By building on the results and addressing the mentioned limitations, future developments can advance the framework of smart city technologies, delivering a better quality of life in urban settings. The current study not only contributes to existing knowledge on the integration of drones and IoT but also enhances the discourse on the smart and sustainable use of urban infrastructure.

References

- Abbas, N., Abbas, Z., Liu, X., Khan, S. S., Foster, E. D., and Larkin, S. (2023). A Survey: Future Smart Cities Based on Advance Control of Unmanned Aerial Vehicles (UAVs). *Applied Sciences*, 13 (17). <https://doi.org/10.3390/app13179881>.
- Ali, H., Karim, S., Saab, M., Hassan, S., Bodnar, N., Ahmed, S., Mustafa, S., et al. (2024). Technological innovations and sustainability: Shaping the future of smart cities in urban planning. *Edelweiss Applied Science and Technology*, 8, 1992-2011. <https://doi.org/10.55214/25768484.v8i4.1577>
- Alsamhi, S. H., Afghah, F., Sahal, R., Hawbani, A., Al-qaness, M. A. A., Lee, B., and Guizani, M. (2021). Green internet of things using UAVs in B5G networks: A review of applications and strategies. *Ad Hoc Networks*, 117, 102505. <https://doi.org/10.1016/j.adhoc.2021.102505>
- Alshbatat, A. (2023). Development of Autonomous Hexacopter UAVs for Smart City Air Quality Management. *Jordan Journal of Electrical Engineering*, 9, 450. <https://doi.org/10.5455/jjee.204-1673429561>
- Amodu, O. A., Nordin, R., Jarray, C., Bukar, U. A., Raja Mahmood, R. A., and Othman, M. (2023). A Survey on the Design Aspects and Opportunities in Age-Aware UAV-Aided Data Collection for Sensor Networks and Internet of Things Applications. *Drones*, 7 (4). <https://doi.org/10.3390/drones7040260>.
- Asaamoning, G., Mendes, P., Rosário, D., and Cerqueira, E. (2021). Drone Swarms as Networked Control Systems by Integration of Networking and Computing. *Sensors*, 21 (8). <https://doi.org/10.3390/s21082642>.
- Bisio, I., Garibotto, C., Haleem, H., Lavagetto, F., and Sciarrone, A. (2022). A Systematic Review of Drone Based Road Traffic Monitoring System. *IEEE Access*, 10, 101537-101555. <https://doi.org/10.1109/ACCESS.2022.3207282>
- De Fazio, R., Dinoi, L. M., De Vittorio, M., and Visconti, P. (2022). A Sensor-Based

- Drone for Pollutants Detection in Eco-Friendly Cities: Hardware Design and Data Analysis Application. *Electronics*, 11 (1).
<https://doi.org/10.3390/electronics11010052>.
- Gohari, A., Ahmad, A. B., Rahim, R. B. A., Supa'at, A. S. M., Razak, S. A., and Gismalla, M. S. M. (2022). Involvement of Surveillance Drones in Smart Cities: A Systematic Review. *IEEE Access*, 10, 56611-56628.
<https://doi.org/10.1109/ACCESS.2022.3177904>
- Honcharenko, T., Khrolenko, V., Gorbatyuk, I., Liashchenko, M., Bodnar, N., and Sherif, N. H. (2024). Smart Integration of Information Technologies for City Digital Twins. 2024 35th Conference of Open Innovations Association (FRUCT).
<https://doi.org/10.23919/FRUCT61870.2024.10516358>.
- Hoque, M. A., Hossain, M., Noor, S., Islam, S. M. R., and Hasan, R. (2022). IoTaaS: Drone-Based Internet of Things as a Service Framework for Smart Cities. *IEEE Internet of Things Journal*, 9 (14), 12425-12439.
<https://doi.org/10.1109/JIOT.2021.3137362>
- Jawad, A. M., Qasim, N. H., Jawad H. M., Abu-Alshaeer, M. J., Nordinc, R., Gharghand, S. K. (2022). Near Field WPT Charging a Smart Device Based on IoT Applications. *CEUR*. <https://ceur-ws.org/Vol-3149/paper7.pdf>
- Jghef, Y. S., Jasim, M. J., Ghanimi, H. M. A., Algarni, A. D., Soliman, N. F., El-Shafai, W., Zeebaree, S. R. M., et al. (2022). Bio-Inspired Dynamic Trust and Congestion-Aware Zone-Based Secured Internet of Drone Things (SloDT). *Drones*, 6 (11).
<https://doi.org/10.3390/drones6110337>.
- Lucic, M. C., Bouhamed, O., Ghazzai, H., Khanfor, A., and Massoud, Y. (2023). Leveraging UAVs to Enable Dynamic and Smart Aerial Infrastructure for ITS and Smart Cities: An Overview. *Drones*, 7 (2). <https://doi.org/10.3390/drones7020079>.
- Miao, Y., Hwang, K., Wu, D., Hao, Y., and Chen, M. (2023). Drone Swarm Path Planning for Mobile Edge Computing in Industrial Internet of Things. *IEEE Transactions on Industrial Informatics*, 19 (5), 6836-6848.
<https://doi.org/10.1109/TII.2022.3196392>
- Pavlenko, V., Ponomarenko, I., Morhulets, O., Osadchyi, V., Ponomarenko, D., and Hrygorevska, O. (2023). Using Artificial Intelligence to Control Drones. 2023 IEEE 7th International Conference on Methods and Systems of Navigation and Motion Control (MSNMC), 24-27 Oct. 2023.
<https://doi.org/10.1109/MSNMC61017.2023.10329033>.
- Qasim, N., Jawad, A., Jawad, H., Khlaponin, Y., and Nikitchyn, O. (2022). Devising a traffic control method for unmanned aerial vehicles with the use of gNB-IOT in 5G. *Eastern-European Journal of Enterprise Technologies*, 3, 53-59.
<https://doi.org/10.15587/1729-4061.2022.260084>
- Qasim, N., Jawad, A., and Majeed, M. (2023). The Usages of Cybersecurity in Marine Communications. *Transport Development*, 3 (18).
<https://doi.org/10.33082/td.2023.3-18.05>
- Qasim, N. H., and Jawad, A. M. (2024). 5G-enabled UAVs for energy-efficient opportunistic networking. *Heliyon*, 10 (12), e32660.

- <https://doi.org/10.1016/j.heliyon.2024.e32660>
- Salunke, A. (2023). *Enhancing Urban Traffic Management through Predictive Modelling and Drone-Captured Image Analysis for Smart Traffic Lights*. <https://doi.org/10.13140/RG.2.2.31014.70721>
- Silva, F. S. D., Neto, E. P., Oliveira, H., Rosário, D., Cerqueira, E., Both, C., Zeadally, S., et al. (2021). A Survey on Long-Range Wide-Area Network Technology Optimizations. *IEEE Access*, 9, 106079-106106. <https://doi.org/10.1109/ACCESS.2021.3079095>
- Srivastava, Y., Virk, S., Ganguli, S., & Tripathi, S. (2022). Smart Cities and the Use of Internet of Drone Things (IoDT). *Internet of Things*, 33-45. <https://doi.org/10.1201/9781003181613-3>
- Sun, M., Xu, X., Qin, X., and Zhang, P. (2021). Aol-Energy-Aware UAV-Assisted Data Collection for IoT Networks: A Deep Reinforcement Learning Method. *IEEE Internet of Things Journal*, 8 (24), 17275-17289. <https://doi.org/10.1109/JIOT.2021.3078701>
- Tran, T.-H., and Nguyen, D.-D. (2022). Management and Regulation of Drone Operation in Urban Environment: A Case Study. *Social Sciences*, 11 (10). <https://doi.org/10.3390/socsci11100474>.
- Yahuza, M., Idris, M. Y. I., Ahmedy, I. B., Wahab, A. W. A., Nandy, T., Noor, N. M., and Bala, A. (2021). Internet of Drones Security and Privacy Issues: Taxonomy and Open Challenges. *IEEE Access*, 9, 57243-57270. <https://doi.org/10.1109/ACCESS.2021.3072030>
- Yu, S., Das, A. K., Park, Y., and Lorenz, P. (2022). SLAP-IoD: Secure and Lightweight Authentication Protocol Using Physical Unclonable Functions for Internet of Drones in Smart City Environments. *IEEE Transactions on Vehicular Technology*, 71 (10), 10374-10388. <https://doi.org/10.1109/TVT.2022.3188769>



پرو، شکاره علوم انسانی و مطالعات فرهنگی
پرتال جامع علوم انسانی