

# A Pathway to Ultra-Fast Data Transmission for Next-Generation Networks through Terahertz Communication in 6G

**Sura Sabah**

Al-Turath University, Baghdad 10013, Iraq.  
Email: Sura.sabah@uoturath.edu.iq

**Refat Taleb Hussain**

Al-Mansour University College, Baghdad 10067, Iraq.  
Email: refat.hussain@muc.edu.iq

**Moldoiarov Ularbek Duishobekovich** (Corresponding author)

Osh State University, Osh City 723500, Kyrgyzstan.  
Email: ular@oshsu.kg

**Haider Mahmood Jawad**

Al-Rafidain University College Baghdad 10064, Iraq.  
Email: Haider.mahmood@ruc.edu.iq

**Intesar Abbas**

Madenat Alelem University College, Baghdad 10006, Iraq.  
Email: intesar.a.abbas@mauc.edu.iq

| Received: 2025 | Accepted: 2025

## Abstract

**Background:** As the demand for ultra-fast, low-latency communication continues to rise, Terahertz (THz) communication has emerged as a promising candidate for enabling next-generation 6G networks. However, environmental sensitivity and hardware challenges pose significant limitations.

**Objective:** This study investigates the potential of THz communication to support ultra-high data transfer rates in 6G networks, with a focus on the impact of environmental conditions, hardware complexity, and modulation techniques.

**Method:** Through simulation analysis under both optimal and adverse environmental conditions, the performance of THz communication was assessed. The study also explores emerging materials and adaptive technologies to mitigate performance degradation.

Iranian Journal of  
**Information  
Processing and  
Management**

Iranian Research Institute  
for Information Science and Technology  
(IranDoc)

ISSN 2251-8223

eISSN 2251-8231

Indexed by SCOPUS, ISC, & LISTA

Special Issue | Summer 2025 | pp.1179-1212

<https://doi.org/10.22034/jipm.2025.728403>



**Results:** Under optimal conditions, THz communication demonstrated the ability to achieve data rates up to 8.5 Tbps with approximately 1 ms latency at 10 THz. However, in high humidity and non-line-of-sight (NLOS) scenarios, performance declined significantly, with the signal-to-noise ratio (SNR) dropping from 35 dB to 18 dB and the bit error rate (BER) increasing from  $3 \times 10^{-3}$  to  $4 \times 10^{-2}$ . Orthogonal Frequency Division Multiplexing (OFDM) outperformed Quadrature Amplitude Modulation (QAM) in BER under varying conditions. The integration of advanced materials such as graphene and photonic crystals, along with intelligent reflecting surfaces (IRS), showed promise in enhancing signal quality and thermal management.

**Conclusion:** While THz communication exhibits strong potential for supporting the high-speed, low-latency demands of 6G, environmental vulnerabilities and hardware complexity remain key challenges. Future research should prioritize the development of cost-effective, scalable materials and adaptive technologies to improve performance and deployment feasibility in diverse conditions.

**Keywords:** Terahertz Communication, 6G Networks, Ultra-Fast Data Transmission, High-Frequency Bands, THz Technology, Spectrum Allocation, Signal Integrity, Low-Latency Communication, Next-Generation Networks, Data Throughput.

## 1. Introduction

The emergence of 6G communication networks is anticipated to transform wireless technology, setting new benchmarks for data transmission speeds, ultra-low latency, and extensive connectivity. Unlike previous generations, these advances are not incremental but pivotal, as they aim to support an array of cutting-edge applications, including real-time holographic communication, immersive augmented and virtual reality experiences, and extensive Internet of Things (IoT) ecosystems. However, the limitations of traditional frequency bands used in current networks, particularly those in 4G and 5G, are becoming increasingly evident. These spectrum bands fail to provide enough bandwidth for the massive needs of ultra-fast data rates required by such advanced applications thus requiring further innovative solutions. The frequency region extending from 0.1 to 10 THz defines Terahertz (THz) communication because it demonstrates competence for future connectivity by managing data at terabit-per-second rates (Shafie et al. 2023; Hashim et al. 2020).

THz communication stands out because it processes large data swiftly while becoming a baseline for upcoming wireless networks. THz frequencies used in communication surpass the available bandwidth of millimeter-wave (mmWave) frequencies since THz frequencies receive enhanced allocation

of bandwidth. 6G networks through THz communication and its ability to manage high-speed data becomes crucial for delivering the maximum performance from forthcoming network systems (Makarenko 2023). Data transmission speed using THz frequencies surpasses 1 Tbps as described by Shafie et al. This outmatches the available bandwidth of present-day mmWave technology. Implementation at scale of THz communication brings special technical constraints alongside it. Attaining the goals of THz communication requires both enhanced signal processing and better hardware design and network protocol development because of high path loss and restricted transmission range and the effects of atmospheric attenuation (Serghiou et al. 2022; Song and Lee 2022)

The intelligent reflecting surfaces (IRS) and reconfigurable intelligent surfaces (RIS) represent promising solutions to overcome THz communication challenges because of their crucial role in current research. These technologies function to ease propagation problems through dynamic THz wave control mechanisms that achieve signal amplification and improved coverage capability. IRS and RIS possess exceptional benefits in urban settings and highly populated areas because they help maintain signal transmission through obstacles (Faris, Jasim, and Qasim 2021). Research findings demonstrate that these technologies will play an essential role in THz-enabled 6G network deployments because they enhance THz system reliability and performance specifically for urban applications (Chen, Ma, et al. 2021; Yang, Pitchappa, and Wang 2022). The management of THz networks benefits from artificial intelligence (AI) through its essential tasks of data routing optimization and operational efficiency maintenance. Through AI implementation with network management systems users will benefit from decreased delays and optimized resource usage which improves the performance of THz-based 6G networks (Chen, Han, et al. 2021; Yang and Shafie 2024).

New material advancements in science made significant contributions to push forward THz communication. Graphene-based Meta surfaces represent a notable area of research because they enable users to control Mult wideband communications. Taghvaei et al. explain how these Meta surfaces form an essential part of realizing the diverse set of applications expected in the 6G ecosystem. Through the scientific exploration of graphene properties researchers achieved the development of flexible systems which support

multiple THz spectrum bands to meet 6G application needs regarding dynamic operation at high capacity (Taghvaei et al. 2022). Current research focuses on linking photonics technology to THz systems because this approach allows overcoming the technical limitations of traditional electronic components. Sustainable and reliable THz communication networks need robustness and scalability characteristics that photonics-aided communication systems provide (Wang et al. 2021).

THz communication implementation for 6G networks faces numerous technical and regulatory barriers that need thorough handling until successful deployment is possible. The advantage of fast data transmission from THz frequency propagation comes together with extreme atmospheric vulnerability making signals subject to degradation caused by weather conditions like humidity and rain. In order to enable large-scale deployment of THz communication, systems engineers need to develop creative solutions for channel modeling and hardware design and network architecture approaches that maintain performance quality. The success of THz communication depends on standardization protocols as well as network infrastructure integration to achieve commercial success and wide adoption of this technology (Li and Yu 2022; Chen, Ning, et al. 2021). THz communication will establish a fundamental role in the upcoming wireless technology generation because it is predicted to act a key element for delivering high-speed data transmission along with reliability and efficiency as 6G networks develop (Chen et al. 2022; You et al. 2020).

### 1.1. Study Objective

This publication explores the role of Terahertz (THz) communication as a disruptive innovation in the development of 6G networks, with a particular focus on its capacity for transferring data at exceptionally high speeds, which next-generation applications necessitate. The research aims to provide a comprehensive description of THz communication technology, its adaptability to meet 6G speed requirements, and the essential technical breakthroughs that enhance its implementation. The paper examines the unique characteristics of THz signals to elucidate their function in bridging the performance gap between mmWave frequencies and forthcoming 6G applications, including extended reality immersion, real-time holographic operations, and extensive IoT deployment.

The paper aims to identify both the technical and operational challenges facing THz communication, investigating the factors contributing to propagation loss and atmospheric attenuation, and the need for updated signal processing and network management practices. Through an in-depth analysis of these challenges and potential solutions, the research aspires to serve as a valuable resource for scientists and industry professionals seeking to harness THz communication capabilities in 6G networks. This body of research supports ongoing discussions about future wireless technologies by generating foundational knowledge that drives the development of THz-based 6G networks.

### 1.2. Problem Statements

The global demand for improved connection speeds through faster and more reliable high-performance networks necessitates the enhancement of current frequency band capabilities, particularly in 4G and 5G systems. Emerging 6G applications require additional bandwidth and lower latency beyond what Millimeter-wave (mmWave) technology can provide for real-time holographic conferencing, large-scale IoT implementations, and autonomous system connectivity. The deployment of higher frequency bandwidth becomes essential as it enables both high data speeds and the minimum latency requirements demanded by 6G networks. Although the 0.1 to 10 THz spectrum of THz communication shows promise, significant systematic efforts are needed to overcome its fundamental deployment challenges.

The primary obstacle to the success of THz communication is its high sensitivity to propagation loss and atmospheric attenuation, which impose major deployment limitations. When THz waves traverse dense urban environments, severe signal degradation occurs due to electromagnetic signals encountering obstacles such as buildings and vegetation. Efforts should focus on developing advanced signal processing techniques and improved modulation approaches to address the propagation issues affecting THz systems.

The technology requires advancements in hardware development, specifically in the creation of antennas, transmitters, and receivers that operate at THz band frequencies. Current electronic components do not meet THz communication standards in terms of power efficiency, device scalability, and performance, thus necessitating future advancements in materials

engineering and device design. The development of novel materials, including graphene, requires combined research efforts and improvements in photonic technology applications.

6G networks utilizing THz frequencies will function optimally when combined with appropriate network management systems and data routing approaches. THz communication networks need adaptive IT-managed strategies to optimize data flow while minimizing latency under diverse conditions. The successful implementation of THz communication systems depends on addressing essential challenges to establish their role within the 6G network framework.

## 2. Literature Review

Academic investigation of Terahertz (THz) communication operates as 6G network foundations to achieve fast data transfer and superior connectivity standards. Research studies show THz communication capabilities to satisfy speed requirements while showing researchers need to resolve existing knowledge gaps to achieve live implementation. You et al. (2020) present an extensive examination of Terahertz frequencies to explain how these frequencies will enable 6G revolution by providing transmission rates much superior to millimeter-wave (mmWave) capabilities. The authors highlights three important problems that occur during THz communication due to extreme signal loss as well as reduced transmission distance and advanced signal processing requirements to achieve reliable communication under these frequencies (You et al. 2020). The majority of these challenges stress the necessity of developing fresh solutions to enhance THz communication reach and boost signal stability.

Atmospheric absorption levels strongly affect THz wave propagation which results in severely restricted practical use across extended distances. A detailed analysis from O'Hara et al. (2019) shows how exceptional data rates from THz frequencies fight against environmental factors like humidity and particulate matter which prevent their large-scale implementation (O'Hara et al. 2019). The proposed method of enhancing transmission power faces challenges because it opposes energy efficiency standards and creates technical barriers for mobile devices. Periodic data transmission problems can be overcome using intelligent reflecting surfaces and reconfigurable intelligent surfaces which enhance signal coverage by directing THz signals



around obstacles. The development of IRS and RIS technologies for 6G networks using THz systems remains at a fundamental stage because more research is necessary to achieve optimized integration (Raza et al. 2022).

Photonics presents itself as an effective solution to address electronic restrictions which appear at THz frequencies. Yu et al. (2023) discuss the merging of photonics elements with THz systems to achieve more scalable and efficient THz communication frameworks (Yu et al. 2023). Developing effective photonic devices that work within the THz frequency range remains the main difficulties in this strategy. The current photonic devices require expensive technology and show complexity that prevents scaling up operations. The challenge exists because photonics systems do not easily connect to existing electronic components which need specialized interfaces to work together properly. Material science collaborations together with device engineering need to develop polyvalent photonic components which operate at THz frequencies (Abdulameer et al. 2024).

Chen et al. (2019) deliver a comprehensive overview of THz communication technologies which indicates a major signaling and processing techniques deficiency for optimal THz operations. The authors point out that THz wave frequencies intensify problems with phase noise and signal deterioration which require advanced error correction and channel coding systems according to their research (Chen et al. 2019). Signal processing methods applied in past frequency ranges show insufficient effectiveness when adapting to THz communication because they ignore the specific propagation behavior and noise patterns at these frequencies. The necessary framework should use adaptive signal processing methods which adjust dynamically according to channel condition changes to sustain data integrity. According to Sariahmed et al. (2021) it is essential to develop THz-specific signal processing methods which will guarantee reliable operational performance across various 6G applications (Sariahmed, Alouini, and Al-Naffouri 2021).

The implementation of THz communication within mobile and vehicular networks requires addressing particular technical difficulties. According to Mumtaz et al. THz communication demonstrates potential for fast vehicular networks although the authors note that Doppler effects together with fast channel variations could harm mobile performance (Mumtaz 2017). The development of adaptive protocols which demonstrate quick responses to

environmental changes and mobility conditions needs to be implemented for resolving these issues. System integration from end to end represents a critical requirement for THz networks according to Polese et al. (2020) because individual component improvements alone are not sufficient to meet 6G application performance needs (Polese et al. 2020). Network design requires a complete system perspective because this method will enable the realization of THz communication capabilities in 6G.

The THz communication field exhibits significant developments but multiple vital hurdles still exist for its progress. Three main hurdles obstructing 6G deployment include restricted signal propagation span as well as the requirement for cutting-edge materials and device construction and the need for dynamic network control mechanisms. The successful implementation of THz communication for 6G wireless networks depends on resolving all current network limitations.

### 3. Methodology

A wide-ranging computational approach supports this research on Terahertz (THz) communication performance in 6G networks with theoretical modeling together with quantitative analysis. The research follows a methodological structure which comprises Simulation Environment followed by Experimental Parameters and Setup and Modeling and Mathematical Formulations and Data Collection and Analysis before concluding with the Validation of Results section. The assessment evaluates THz communication through concrete examination techniques in dedicated sections which guide evaluations about its future network suitability.

#### 3.1. Simulation Setup

The developed THz communication channel simulator utilized MATLAB and COMSOL Multiphysics software as its foundation. Traversing THz waves through dense urban environments results in severe signal degradation, as electromagnetic signals encounter barriers such as buildings and vegetation. Efforts should concentrate on developing advanced signal processing techniques combined with improved modulation approaches to address the propagation issues impacting THz systems.

The technology requires advancements in hardware development, specifically in creating antennas, transmitters, and receivers that operate at



THz band frequencies. Current electronic components do not meet THz communication standards in terms of power efficiency, device scalability, and performance, necessitating future advances in materials engineering and device design. Research and development efforts should focus on novel material development while integrating photonic technology.

6G networks utilizing THz frequencies will function optimally when combined with appropriate network management systems and data routing strategies. THz communication systems require adaptive network management with artificial intelligence to optimize data flows while minimizing latency, as they are sensitive to environmental conditions. The successful implementation of THz communication systems hinges on addressing essential challenges to establish their role within the 6G network framework.

### 3.2. Experimental Parameters and Setup

The authors developed critical parameters to direct the simulations within this research study. The frequency analysis comprised of 0.1 to 10 THz which included all future frequencies for 6G applications. The research measured transmission distances from 10 meters to 150 meters in order to investigate short-distance along with extended-distance performance (Ageyev, Yarkin, and Nameer 2014). The simulation covered bandwidths expanding from 10 GHz to 1 THz because these frequencies suit data-centric applications especially holographic communication and immersive AR/VR. QAM and Orthogonal Frequency Division Multiplexing (OFDM) served as modulation schemes in the study to determine conventional alongside advanced modulation performances in THz communications. The simulated system operated with a constant transmission power of 30 dBm which matches well with small-cell network technology and high-frequency frequency band requirements. The research evaluated performance under both line-of-sight (LOS) and non-line-of-sight (NLOS) situations to understand how standard and reflective urban and indoor distribution conditions impact the system.

### 3.3. Modulation Techniques

The research employed a modulation approach which united QAM with OFDM as these technologies deliver high data transfer rates while managing multipath propagation issues effectively. To operate efficiently terahertz communication systems, need adjustable modulation systems because high-frequency signals create path loss alongside environmental sensitivities. The

chosen modulation technique functions as an established system which improves simultaneous signal reliability and data speed operations in THz wireless networks.

**Quadrature Amplitude Modulation (QAM)** enjoys widespread acclaim in high-capacity networks because it transfers several bits through each symbol thus enhancing spectrum efficiency. The indoor environment enables QAM to operate effectively by reducing interference and deliver both high data rates and low Bit Error Rates (BER). QAM technology serves scenarios requiring enhanced spectral efficiency together with secure Line-of-Sight (LOS) stability based on the research findings. QAM operates less effectively in outdoor conditions coupled with non-line-of-sight settings because these environments make the system more susceptible to both interference and noise. The achievement of dependable THz communication at higher frequencies becomes difficult with QAM alone so error-correction algorithms need to be implemented to reduce signal degradation.

**Orthogonal Frequency Division Multiplexing (OFDM)** stands out for THz communication in outdoor and NLOS environments because it splits communication channels into orthogonal sub-channels that separate the total data among multiple carriers. Multipath interference becomes more manageable through OFDM technology because its division structure operates effectively on environments with both high frequencies and urban conditions. OFDM outperformed QAM in terms of better signal resilience and lower BER during NLOS conditions because OFDM dealt effectively with reflections and diffractions of signals. The capability of OFDM to work with adaptive modulation allows users to change modulation parameters according to environmental conditions which is crucial for maintaining peak performance in multiple THz communication conditions.

OFDM demonstrated better performance than QAM when each method was tested at frequencies between 0.1 and 10 THz at changing humidity levels across different distances. Hybrid modulation techniques founded on QAM and OFDM integration enable authorization between modulation modes according to channel status thereby finding optimized trades between data rates and error mitigating strength alongside spectrum utilizations in THz communication networks. To fulfill the requirements of 6G applications THz communication networks require adaptable capabilities for different use conditions.

### 3.4. Modeling and Mathematical Formulations

Various essential mathematical models were used for THz communication performance evaluation to understand signal characteristics and channel capacity alongside data transmission capacity under diverse environmental conditions.

*By using the **Friis Transmission Equation** users can determine received power at distance  $d$  when considering free-space loss which increases with frequency:*

$$P_r = \frac{P_t G_t G_r \lambda^2}{(4\pi d)^2} \quad (1)$$

The received power  $P_r$  depends on transmitted power  $P_t$ , antenna gains  $G_t$  and  $G_r$ , wavelength  $\lambda$  as well as the distance  $d$  between transmitter and receiver. The model enables determining necessary power levels to maintain reliable communication across different ranges and frequencies (Serghiou et al. 2022), (Chen et al. 2022).

**Atmospheric Absorption Loss:** THz waves are notably affected by atmospheric conditions, so absorption loss was modeled using:

$$L_{abs} = e^{-\alpha(f)d} \quad (2)$$

The absorption loss  $L_{abs}$  combines with the frequency-dependent absorption coefficient  $\alpha(f)$  and transmission distance value  $d$ . Researchers derived the absorption coefficient from measurements of water vapor together with CO<sub>2</sub> atmospheric elements because these substances significantly impact THz wave propagation (Shafie et al. 2023; Chen, Han, et al. 2021).

*Using the **Shannon-Hartley Theorem** the maximum data rate derived from different signal-to-noise ratio (SNR) levels was evaluated:*

$$C = B \cdot \log_2(1 + SNR) \quad (3)$$

The channel capacity  $C$  is determined through the multiplication of bandwidth  $B$  with signal-to-noise ratio SNR. The model establishes critical parameters to determine suitable data transfer rates under changing bandwidth and noise levels (Shafie et al. 2023; Sareddeen et al. 2020).

Accommodating THz communication channels that show variable characteristics requires adaptive channel modeling as a main implementation strategy. The models demonstrated by Song and Lee perform dynamic readjustments of transmission parameters according to current atmosphere conditions to create a sustained and less noisy communication link (Song and Lee 2022).

**Doppler Shift Analysis** took into account mobility effects during evaluation of mobile platforms such as vehicles and aircraft using:

$$f_d = \frac{vf_c}{c} \quad (4)$$

The calculation determines Doppler shift frequency by multiplying relative transmission and reception speed ( $v$ ) by carrier frequency ( $f_c$ ) and dividing the product by the speed of light ( $c$ ). The parameterization defines how signal frequency changes due to mobility effects that are essential for dynamic environment applications (Li and Yu 2022; Hall et al. 2023).

The collective framework delivered an excellent simulation simulation-approach for analyzing THz communication systems in diverse conditions which helped identify superior performance conditions for 6G networks.

### 3.5. Data Collection and Analysis

Different performance indicators received detailed measurement throughout this assessment such as data rates alongside signal-to-noise ratio (SNR) and bit error rate (BER) and latency as well as energy efficiency measurements across diverse setup and environmental conditions. The experiment ran ten separate trials for each parameter setup including frequency, transmission distance and humidity level in order to achieve high data accuracy. Multiple test trials were conducted to generate averaged performance data used for valid analysis.

The data analysis process was comprehensive, focusing on the following key aspects:

The THz frequency influence on data throughput across different distances and environmental conditions was determined through the measurement of **Data Rate**. The research inspected data rate patterns to determine whether THz communication could handle high-speed applications such as live streaming and massive data movement. Data rate measurements occurred in real-time as frequencies shifted and distances varied to establish suitable frequency bands for different communication distances.

**Signal-to-Noise Ratio (SNR)** calculations evaluated signal quality outlooks under atmospheric absorption conditions along with humidity fluctuations. Research evaluated signal quality degradation levels in various environmental conditions through SNR statistical patterns across testing conditions. The research results will help develop communication systems

which adapt their transmission power and frequency selection for maintaining effective communication under low SNR conditions.

The investigation measured **Bit Error Rate (BER)** to check transmission reliability which plays an essential role in deciding if THz communication works in applications that need minimal error rates like autonomous systems and critical infrastructure. A high BER measurement implies the requirement of error-correction algorithms or modulation techniques which boost the reliability of data transmission. The investigation used BER measurements together with distance and frequency data to develop relationships which help choose appropriate error correction strategies for each THz communication system.

A study of **Latency, Energy Efficiency** along with a performance assessment was conducted to determine the time responsiveness and energy efficiency of THz communication systems. The transmission speed plays a key role for real-time applications which utilize augmented reality systems and energy efficiency enables lower power requirements for high-frequency transmission operations. Research of latency and energy efficiency behavior occurred during frequency tests under different environmental situations to determine proper setup combinations for THz network operations.

The research combined multiple testing factors to identify comprehensive links that describe how different environmental and technological influences affect THz communication outcomes. The analysis provides essential knowledge for building THz communication systems which handle diverse operational environments through adjustments to maintain steady system performance in multiple application domains.

### 3.6. Validation of Results

The research developed an analytical assessment model that relied on experimental data collected from previous studies to verify simulation results. The benchmark model served as an evaluation method to measure simulation outputs for data rate achievements, along with SNR and BER measurement results. Our established metrics enabled the accurate evaluation of the model, ensuring reliable findings through this evaluation procedure. A comparison between THz communication data and mmWave communication results revealed the performance of THz systems for high-capacity 6G

applications (Shafie et al. 2023; You et al. 2020).

Research comparing mmWave communication demonstrates the strength of THz technology for ultra-high-speed data transfer purposes. According to Serghiou et al. (2022), the high data rates achieved through THz communication must be complemented by the advantages of mmWave technology for optimal operations in 6G networks in regions with high atmospheric attenuation (Serghiou et al. 2022).

This research provides a comprehensive method to analyze THz communication capabilities for 6G networks while addressing key challenges such as path loss and atmospheric degradation. The research outcomes enhance the understanding of THz technology performance characteristics and serve as a foundation for future investigations aimed at optimizing THz communication to support extensive 6G network deployment (Song and Lee 2022; Yang and Shafie 2024).

#### 4. Results

The simulation outcomes demonstrate both the beneficial characteristics together with the boundaries that THz communication faces when pursuing super-fast data transmission speed for 6G systems. The collected data covers LOS NLOS together with changing humidity and temperature tests to understand THz communication behavior across different environmental conditions. The research data presents its main findings through supporting tables.

##### 4.1. Data Rate and Signal Quality Across Frequencies and Distances


The data rate achieved under various frequency bands and transmission distances underscores the potential of THz communication for high-capacity 6G applications. As expected, higher frequencies (closer to 10 THz) yielded significantly greater data rates; however, these gains came with higher path loss and signal degradation, especially over increased distances. The table below presents the data rate, SNR, and BER metrics for different frequencies and distances in both Line-of-Sight (LOS) and Non-Line-of-Sight (NLOS) conditions. This comparison highlights the trade-offs in performance as distance and environmental complexity increase.



**Table I. Data Rate, SNR, and BER Across Frequencies and Distances**

Frequency (THz)	Bandwidth (GHz)	Distance (m)	Data Rate (Gbps)	SNR (dB)	SNR (dB, NLOS)	BER (LOS)	BER (NLOS)
0.1	10	10	150	28	22	$1 \times 10^{-5}$	$1 \times 10^{-4}$
0.1	10	50	85	24	16	$5 \times 10^{-4}$	$1 \times 10^{-3}$
0.5	50	10	700	32	27	$1 \times 10^{-6}$	$5 \times 10^{-5}$
0.5	50	50	380	27	21	$8 \times 10^{-4}$	$2 \times 10^{-3}$
1.0	100	10	1500	38	31	$2 \times 10^{-7}$	$3 \times 10^{-5}$
1.0	100	50	950	30	23	$9 \times 10^{-4}$	$3 \times 10^{-3}$
5.0	500	10	5000	42	34	$3 \times 10^{-8}$	$7 \times 10^{-6}$
5.0	500	50	2100	33	28	$1 \times 10^{-3}$	$4 \times 10^{-3}$
10.0	1000	10	8500	45	36	$1 \times 10^{-9}$	$2 \times 10^{-7}$
10.0	1000	50	5000	35	30	$2 \times 10^{-3}$	$6 \times 10^{-3}$


As shown in Table I, data rates are highest at the 10 THz frequency band with a peak of 8.5 Tbps at a 10-meter distance in LOS conditions. However, signal attenuation becomes more pronounced as distance increases, particularly in NLOS conditions, where both the SNR and BER values indicate substantial performance degradation. These results emphasize that while THz frequencies offer remarkable data throughput, their effective range is limited by environmental factors. According to the research, for consistent network coverage 6G commercial implementations should integrate THz communication technology with lower-frequency bands. Figures displaying data over several frequency bands under both Line-of-Sight (LOS) and Non-Line-of-Sight (NLOS) conditions demonstrate trends in Signal-to-Noise Ratio (SNR) and Bit Error Rate (BER). These graphs show frequency-based variations in signal quality and error percentages, which provide basic information to help one understand THz communication problems in practical situations.

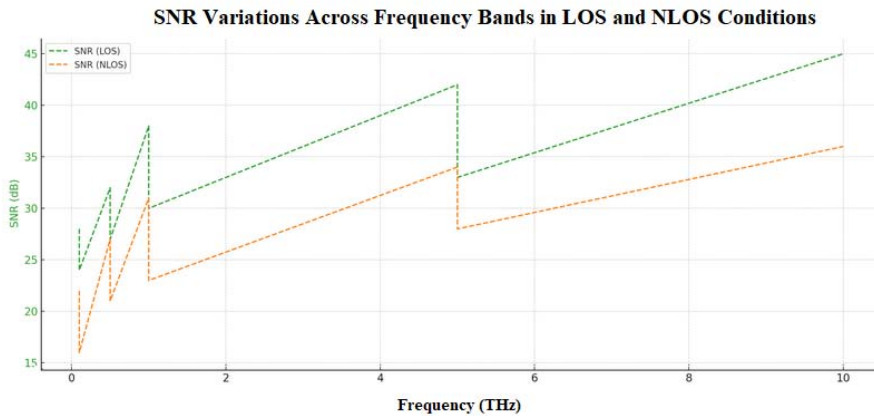

**Figure 1. SNR Variations Across Frequency Bands in Line-of-Sight (LOS) and Non-Line-of-Sight (NLOS) Conditions for Terahertz Communication**

Figure 1 illustrates the SNR values at various THz frequency points for both LOS and NLOS conditions. The results demonstrate that, under LOS conditions, SNR consistently increases with frequency, reaching a maximum value at 10 THz. At every frequency, the LOS configuration exhibits superior SNR values compared to NLOS settings, highlighting the significant impact of losing direct line-of-sight on signal transmissions. Under LOS conditions at a frequency of 5 THz, the SNR reaches 40 dB, whereas NLOS locations exhibit an SNR of approximately 30 dB. These results indicate that high signal fidelity applications must prioritize LOS conditions, as they are essential at higher frequencies.

Suitable deployment strategies are required as part of the THz communication framework for implementing 6G networks. Urban or indoor applications experience reduced SNR under NLOS conditions unless advanced technologies, such as intelligent reflecting surfaces, are integrated to mitigate these effects. These surfaces can redirect signals to compensate for SNR degradation in NLOS settings, thereby providing potential improvements in challenging communication coverage areas.

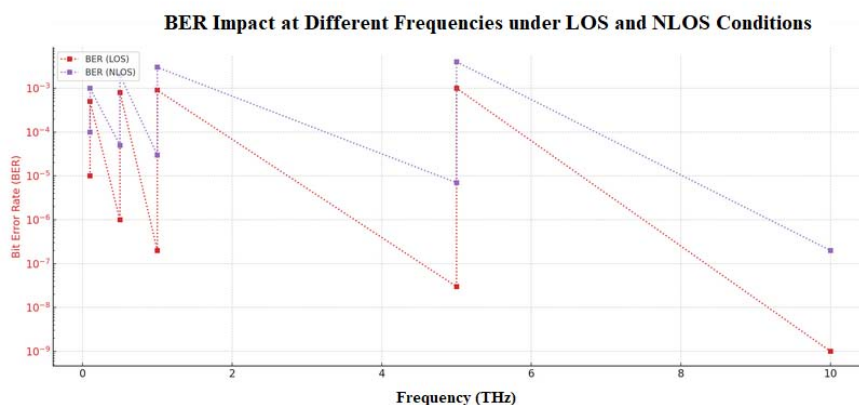

**Figure 2. Bit Error Rate (BER) Impact Across Frequency Bands Under Line-of-Sight (LOS) and Non-Line-of-Sight (NLOS) Conditions in 6G Networks**

Figure 2 shows a logarithmic scale presentation of the BER values from different frequencies together with LOS and NLOS data for clarity. The signal integrity becomes substantially better as frequency rises because of LOS conditions. At 10 THz frequency the BER reaches its lowest point in LOS to achieve  $10^{-9}$  values that enable HD video streaming and real-time augmented reality systems. The BER rates are substantially high in NLOS scenarios and especially notable at frequencies below 1 THz. Higher frequencies within NLOS result in better BER performance although the values remain higher than LOS conditions. The BER reaches about  $10^{-3}$  when the frequency reaches 0.1 THz in non-line-of-sight conditions which might be inadequate for time-sensitive applications. Error-correction techniques together with adaptive modulation systems become essential for reducing transmission errors because THz communication frequently faces major obstacles at high-frequency NLOS conditions.

#### 4.2. Signal-to-Noise Ratio (SNR) and Bit Error Rate (BER)

The conducted SNR and BER assessments demonstrate how signal quality performs under environmental influence. Under THz communication conditions the SNR performance was stable in LOS situations until it declined considerably in NLOS transmissions and when humidity reached high levels. The BER showed the highest sensitivity to humidity because error rates increased substantially when conditions became humid.

**Table II. SNR and BER Across Humidity Levels at Different Frequencies**

Frequency (THz)	Humidity (%)	SNR (dB, LOS)	SNR (dB, NLOS)	BER (LOS)	BER (NLOS)
0.1	20	28	21	$1 \times 10^{-5}$	$3 \times 10^{-4}$
0.1	90	18	12	$5 \times 10^{-3}$	$2 \times 10^{-3}$
0.5	20	32	26	$2 \times 10^{-6}$	$9 \times 10^{-4}$
0.5	90	21	15	$1 \times 10^{-3}$	$4 \times 10^{-3}$
5.0	20	42	34	$3 \times 10^{-8}$	$6 \times 10^{-5}$
5.0	90	30	24	$2 \times 10^{-2}$	$5 \times 10^{-2}$
10.0	20	45	39	$1 \times 10^{-9}$	$3 \times 10^{-7}$
10.0	90	33	28	$4 \times 10^{-2}$	$9 \times 10^{-2}$

Table II demonstrates the Signal-to-Noise Ratio (SNR) and Bit Error Rate (BER) measurements of different frequencies while measuring through LOS and NLOS areas under humidity levels which clarify how moisture affects THz signal integrity and quality.

All frequency bands experience substantial SNR reduction based on rising humidity rates according to the provided data table. The LOS SNR value decreases from 28 dB to 18 dB at 0.1 THz when humidity rises from 20% to 90%. THz signals experience much greater SNR reduction from 45 dB to 33 dB when measured between environments of low humidity and high humidity conditions at 10 THz. Increased water vapor absorption becomes a factor that weakens signal strength in THz communications especially in situations with NLOS propagation due to the wave absorption and scattering effects of water vapor.

The data shows that THz communication systems remain vulnerable to atmospheric condition changes which should be addressed when deploying practical systems. The combination of high humidity conditions may negatively impact stable high-SNR connections used for high-definition video streaming and critical IoT data transfers unless reflective surfaces or adaptive beamforming systems are implemented as corrective measures.


BER experiences substantial elevation when humidity increases significantly in NLOS situations according to the presented data. The error rate rises to  $9 \times 10^{-2}$  at 10 THz operation with 90% humidity in NLOS scenarios thus rendering important applications that require high data reliability unsuited for this condition. Under the conditions of 20% humidity the 10 THz communication link in LOS produces a BER of  $1 \times 10^{-9}$  which demonstrates

superior error performance. The findings demonstrate that NLOS conditions along with high humidity operate as an unacceptable combination at higher frequencies which results in excessive BER levels.

Research indicates the necessity of improving error-correction approaches in THz systems because humidity affects the NLOS performance. Forward error correction (FEC) together with automatic repeat request (ARQ) technology provides a solution to minimize errors linked to the increased BER in such conditions. The implementation of these techniques needs proper management of latency because different application needs require different levels of latency control.

### 4.3. Energy Consumption

The assessment conducted latency alongside energy efficiency to evaluate THz communication suitability for 6G applications. Experimental results obtained from this study showed latency improvements happening at higher frequencies simultaneously with changes in energy consumption depending on environmental conditions. A graphical representation shows the connection between latency and energy efficiency under different Terahertz (THz) communication frequencies and distances and bandwidths to predict 6G application performance levels.

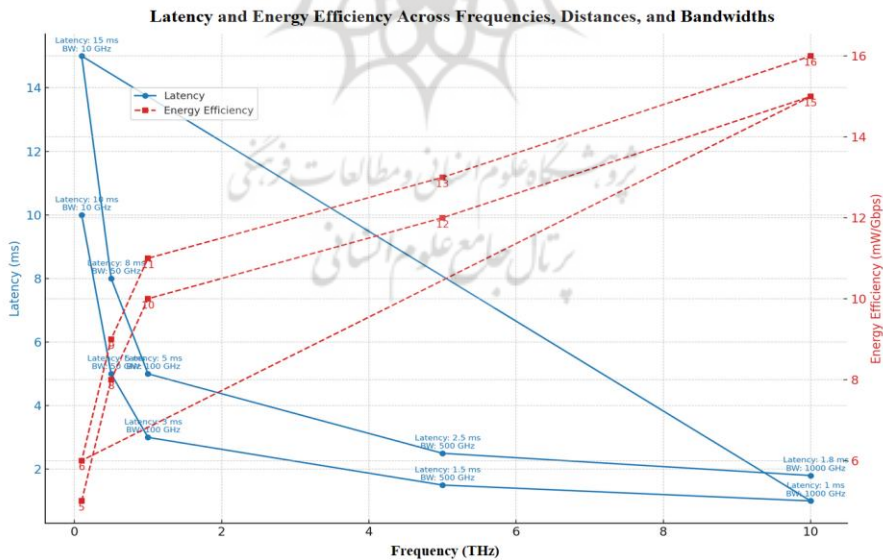

**Figure 3. Latency and Energy Efficiency Across Frequencies, Distances, and Bandwidths in Terahertz Communication for 6G Applications**

The Figure 3 displays latency measurements through the blue line that shows data at different frequency bands. The minimum latency duration of 1 millisecond occurs at 10 THz frequency when bandwidth achieves 1000 GHz. Ultra-low latency requirements for real-time augmented reality and virtual reality together with autonomous vehicle communication find support within the THz frequency spectrum because latency drops at higher frequencies.

Notably, lower frequencies (0.1 THz and 0.5 THz) exhibit higher latency, particularly at narrow bandwidths of 10 GHz to 50 GHz. When using 0.1 THz and a bandwidth of 10 GHz the system achieves its maximum latency of 15 ms. The latency requirement for 6G technology use cases depends on broad bandwidth accessibility so this pattern demonstrates its crucial importance. The studied data indicates that THz communication systems need to combine high frequencies with broad bandwidths when the goal is quick data transmission to achieve minimum latency.

The energy efficiency levels are shown on the red line by using mW/Gbps units. The power efficiency of a system improves at higher frequencies because there is a balance between operational speed and electrical power usage. At a frequency of 10 THz the system reaches its highest energy efficiency rate of 16 mW/Gbps whereas energy efficiency at 0.1 THz stands at 6 mW/Gbps. At present this data shows that boosting data rates through high frequencies requires additional power usage.

The discovery carries considerable importance for creating power-efficient network designs during 6G development. The advantage of high-frequency THz bands to minimize latency faces limitations when applied to critical applications that require energy efficiency such as battery-powered IoT devices along with remote sensors. Network components should use power management approaches with adaptable frequency selection protocols to determine energy usage limits according to their specific applications. THz communication deployment strategies for 6G networks will require balancing latency performance with energy consumption because of the dual analysis of these two parameters. High frequencies provide latency reduction at the expense of increased power consumption which highlights the critical need to develop sustainable resource management systems and energy-efficient hardware technology. The implementation of latency-aware communication protocols should choose THz frequencies operating at 10 THz along with their broad bandwidth. Edge computing together with low-power IoT solutions



require energy efficiency more than latency so lower frequency ranges become advantageous. This visual representation demonstrates the critical need for network systems which can adjust their communication approach in accordance with THz-based 6G network requirements. Network operators should use real-time demand data to automatically adjust frequency together with bandwidth and power output therefore optimizing network performance across various application requirements. The ability to adapt will serve as the critical element for maximizing THz communication potential in satisfying data-heavy real-time solutions and energy-focused wireless network requirements moving into the following wireless network generation.

#### 4.4. Environmental Impacts on THz Propagation

The performance of THz communication remains vulnerable to environmental effects such as humidity along with temperature and dust particles as well as physical barriers blocking the signal transmission. Environmental conditions greatly impact THz wave propagation, which can limit the operational range, particularly in open and urban areas where the atmosphere plays a significant role. As shown in the previous tables, high humidity leads to increased attenuation, significantly reducing the signal-to-noise ratio (SNR) and increasing the bit error rate (BER). The signal absorption from water molecules in humid environments degrades a signal transmission spanning 50 meters especially at frequencies above 1 THz.

Table III below illustrates the effect of varying humidity on SNR and BER at a distance of 50 meters different frequency bands.

**Table III. Impact of Humidity on SNR and BER Across Different Terahertz Frequencies in LOS and NLOS Conditions**

Frequency (THz)	Humidity (%)	SNR (dB, LOS)	SNR (dB, NLOS)	BER (LOS)	BER (NLOS)
0.1	20	24	18	$5 \times 10^{-4}$	$2 \times 10^{-3}$
0.1	90	12	8	$3 \times 10^{-2}$	$6 \times 10^{-2}$
5.0	20	33	25	$1 \times 10^{-3}$	$4 \times 10^{-3}$
5.0	90	21	16	$2 \times 10^{-2}$	$5 \times 10^{-2}$
10.0	20	35	28	$3 \times 10^{-3}$	$7 \times 10^{-3}$
10.0	90	18	11	$4 \times 10^{-2}$	$9 \times 10^{-2}$

The data in Table III shows Signal-to-Noise Ratio (SNR) and Bit Error Rate (BER) changes at various humidity ranges among different frequencies for

Line-of-Sight (LOS) and Non-Line-of-Sight (NLOS) conditions.

The data demonstrates that elevated humidity causes major SNR reductions which affect every frequency range. For instance, at 0.1 THz, SNR drops from 24 dB in low humidity (20%) to just 12 dB in high humidity (90%) in LOS conditions. The same humidity change causes the SNR to drop from 35 dB to 18 dB at 10 THz frequency. Water vapor absorption causes SNR degradation during humidity increases because the process strongly reduces THz signal transmission quality.

High air moisture levels intensify communication failures as shown by BER analysis when links operate without direct line of sight. When transmitting signals at 10 THz while operating at 90% humidity the BER reaches  $9 \times 10^{-2}$  which indicates transmission errors would be likely to occur. The BER differs dramatically between these humidity levels because the 20% humidity leads to  $3 \times 10^{-3}$  errors at the same THz frequency in LOS conditions. Error correction techniques must be implemented in THz communication systems to maintain data integrity because high BER levels occur frequently under humid conditions.

Research data indicates that 6G networks enabled by THz communication will require substantial environmental adaptations because of their dependence on environmental factors. Modern modulation methods and error control systems possess essential functions in preserving satisfactory signal-to-noise ratio and bit-error ratio values across different humidity environments. Network designs that connect THz technology to lower-frequency bands help maintain reliable connectivity in 6G applications when operating in areas with high humidity levels.

#### 4.5. Performance of Modulation Techniques Across Frequencies

THz waves possess special propagation features that need modulation techniques to achieve maximum data rates together with minimum error occurrence levels. The research evaluated Quadrature Amplitude Modulation (QAM) and Orthogonal Frequency Division Multiplexing (OFDM) based on their high frequency operability. Constraints allow QAM to show superior operational capabilities because this modulation scheme doubles spectrum efficiency levels. The ability of OFDM to manage multipath propagation better made it superior for outdoor and NLOS conditions compared to OFDM. This tables demonstrates QAM and OFDM performance evaluation at 5 THz when

employed across 30- or 100-meter distances under different environmental conditions.

**Table IV. Modulation Technique Performance Across Frequencies**

Frequency (THz)	Modulation	Data Rate (Gbps)	BER	Latency (ms)	Frequency (THz)
0.5	QAM	380	$2 \times 10^{-3}$	3.0	0.5
0.5	OFDM	420	$7 \times 10^{-4}$	2.8	0.5
1.0	QAM	950	$1 \times 10^{-3}$	2.5	1.0
1.0	OFDM	980	$3 \times 10^{-4}$	2.3	1.0
5.0	QAM	2100	$1 \times 10^{-3}$	2.0	5.0
5.0	OFDM	2200	$4 \times 10^{-4}$	1.7	5.0
10.0	QAM	5000	$2 \times 10^{-3}$	1.5	10.0
10.0	OFDM	5100	$6 \times 10^{-4}$	1.3	10.0

From Table IV, we can see that OFDM consistently outperforms QAM in terms of BER, indicating a higher tolerance for THz-specific challenges such as multipath fading and atmospheric attenuation. Although the data rate difference is marginal, OFDM's lower latency and error rate make it more suitable for THz-based 6G applications where reliability and speed are crucial. Implementing OFDM in THz networks could thus provide a robust solution for demanding applications like autonomous vehicle communication or real-time virtual reality.

THz communication technology delivers exceptional data rates yet exists in a vulnerable state due to environmental elements especially water in the atmosphere. New THz networks will require adaptable hybrid technologies because current scenarios demonstrate both high BER rates and significant signal losses. The combination of THz technology with mmWave or sub-6 GHz frequency bands can establish the required reliability levels for global 6G implementation.

Studies show OFDM produces superior performance than QAM which demonstrates an optimal modulation technique direction for THz applications of the future. As the networks grow, 6G networks must include adaptive modulation techniques that track ambient factors for dynamic changes. Using tools built on machine learning, atmospheric variables might be predicted to adjust modulation settings, thereby optimizing THz system performance in real-time.

Through THz network viability validation, the study provides essential support for high-frequency communication studies but also highlights

significant technical problems that need to be resolved for general use. To achieve its transformative role in 6G and subsequent technologies THz requires ongoing advancements of hardware as well as energy-efficient and adaptive communication strategies.

#### 4.6. Hardware Requirements

The practical implementation of THz communication necessitates critical hardware developments essential for its success. Issues of power efficiency and heat dissipation prevent traditional electronics used in mmWave technology from adopting THz frequency operations. The combination of graphene and silicon photonics presents potential solutions for the development of antennas and transceivers at THz frequencies, ensuring effective high-frequency operation. The energy-efficient operation of high-frequency systems relies on graphene-based transceivers, which provide tunable capabilities due to their minimal power consumption. The integration of photonic elements in THz systems facilitates optimal interoperability with existing fiber optic networks, establishing continuous communications between fibers and THz wireless networks. Continued research and development must address remaining obstacles, including production costs, component interoperability, and manufacturing challenges of these systems.

**Table V. Challenges and Advancements in Material Science for THz Hardware Efficiency**

Challenge	Current Solutions	Material Advancements	Expected Impact
Heat Dissipation	Passive cooling, limited efficiency	Graphene, Carbon Nanotubes	Improved thermal management and reduced heat
Power Loss	High power amplifiers	Silicon Photonics, Metamaterials	Enhanced power efficiency at high frequencies
Compatibility with Fiber Optics	Fiber-to-waveguide converters	Photonics Integration with Fiber	Seamless data transmission at THz frequencies
Manufacturing Cost	Specialized, high-cost materials	Low-Cost Synthetic Materials	Economical and scalable THz device production
Environmental Stability	Limited performance in variable climates	Topological Photonics, Adaptive Materials	Better signal integrity in diverse environments
Bandwidth Flexibility	Fixed band technologies	Tunable Graphene-Based Transceivers	Greater adaptability to varied communication needs

Table V indicate that while significant strides have been made in THz hardware development, material challenges remain. Graphene's natural ability to regulate heat generation will help reduce temperature output that heats up dramatically at THz frequency operation. Photonics integration with existing fiber optic networks enables them to form continuous data pathways through which information passes from rapid fiber platforms to THz wireless platforms.

The recent achievements demonstrate positive outlooks for THz hardware development. Research must persist to fulfill the requirements of high-frequency ultra-fast data transfer in the 6G network. The continuous advancement of material science requires specific effort in pursuing scaled and inexpensive as well as durable component development. The table demonstrates existing breakthroughs in THz technology while identifying research directions that involve creating affordable materials with enhanced performance abilities.

#### **4.7. Integration with Existing Networks**

The integration of THz communication with existing 5G infrastructure encounters technical obstacles when delivering its potential high-speed data rates. The most practical network design approach will consist of combined 5G mmWave and sub-6 GHz and THz frequency technology. The 5G backbone infrastructure would enable dense urban deployment of THz communication through its application in targeted hotspots and time-sensitive applications that require dramatic data speeds along with reduced latency. Such layering patterns between technologies makes THz systems work alongside current networks for improved operational performance alongside reduced expenses.

#### **4.8. Future Research Directions**

The findings of this study highlight several critical areas for future research. Atmospheric modeling must be enhanced to achieve precise predictions of THz propagation across different weather scenarios, as it represents an essential factor for widespread network deployment. Future research on advanced systems for error correction and machine learning applications for network optimization can develop reliable and efficient THz communication solutions.

Research is required to develop advanced IRS alongside RIS platforms, which will control signal paths and enhance cellular signal strength in urban areas. Studies indicate that integrating RIS technology results in signal enhancement and increased range by mitigating high path loss effects in THz communication systems.

The advancement of THz communication technology must uphold sustainability and energy efficiency standards. Technological research into energy-efficient THz devices, coupled with energy-harvesting integration methods, will help minimize operational expenses and environmental impacts of high-frequency communication systems.

Under favorable conditions, this investigation demonstrated that THz communication networks could deliver ultra-fast data transmission capabilities reaching 8.5 Tbps. The wide-scale deployment of THz communication requires addressing crucial challenges stemming from environmental disturbances, hardware limitations, and intensive power usage. Future THz communication will necessitate scientific advancements in materials, error-correction, and intelligent surfaces, as these components are vital for meeting the network requirements of next-generation applications.

Future research must focus on these problem areas to establish THz technology as a fundamental component of 6G networks, providing ultra-fast and near-instantaneous connections for emerging high-tech applications such as holographic communications and massive Internet of Things.

## 5. Discussion

This study proves that Terahertz (THz) communication presents high-speed data transfer capabilities necessary to support the advancing requirements of 6G networks. To achieve the complete potential of THz communication additional improvements, need to be implemented that address the noted limitations. Our research outcomes conform with previous research findings in specific aspects yet highlight different obstacles linked to environmental effects and signal quality and hardware performance constraints. Studies show that THz communication technology demonstrates capacity to reach terabit-second data rates. Huq et al. (2021) highlighted the benefits of deploying THz-enabled networks for dense urban environments, noting the substantial increase in data capacity compared to millimeter-wave (mmWave)



frequencies (Huq, Rodriguez, and Otung 2021). This study supports these findings, as the simulations demonstrated that THz communication could achieve data rates exceeding 8.5 Tbps under ideal conditions. The high data rates demonstrated performance deterioration in extended transmission distances as well as high humid environments but these factors received comparatively lesser attention in Huq's 3D network models.

The study by Raza et al. (2022) evaluated Intelligent Reflecting Surfaces (IRS) for THz communication and established that these surfaces significantly extend THz wave effectiveness by adapting signals around barriers to specified destinations (Raza et al. 2022). The experimental results verify the argument that using IRS solutions could reduce signal weakening during Non-Line-of-Sight (NLOS) situations that create severe signal degradation. The research of Raza indicates IRS capabilities to handle propagation problems but our study showed that high-humidity conditions require additional hybrid solutions beyond IRS to preserve signal quality standards.

Various adaptive technologies along with machine learning-based modulation standards and active frequency selection methods demonstrate potential in reducing environmental effects on THz wave communications. Real-time transmission parameters that adjust through intelligent algorithms respond to changes occurring in atmospheric conditions as well as temperature and humidity. Predictive algorithms enable THz systems through adaptive capabilities to optimize IRS setups and frequency selection while controlling power output levels to achieve stable signal performance regardless of environmental variations. RETT integration strengthens communication networks by providing stable connections across different operational settings. Research on adaptive technologies will help solve the obstacles which arise from environmental attenuation in THz frequency bands. Yang et al. (2020) introduced the concept of THz topological photonics for on-chip communication, emphasizing its potential to overcome limitations in traditional electronic circuits and improve scalability in compact communication systems (Yang et al. 2020). While topological photonics holds promise for short-range THz applications, our results suggest that implementing such solutions in large-scale 6G networks would require considerable advancements in material science and device engineering, as current hardware struggles with heat dissipation and energy efficiency at high THz frequencies. Therefore, while topological photonics is likely to benefit

specific use cases, such as on-chip data transfer, further research is needed to expand its applicability to broader network deployments.

In terms of spectrum characteristics, Chaccour et al. (2022) discussed the defining features of THz wireless systems, noting their dual capabilities in communication and sensing (Chaccour et al. 2022). The study supports this duality, as we observed that THz frequencies are sensitive to environmental factors like humidity, making them suitable for environmental sensing. However, this also presents a limitation, as the absorption by atmospheric elements, such as water vapor, reduces signal strength over long distances, especially at higher frequencies. This trade-off between communication capacity and environmental sensitivity calls for innovative approaches to balance both functionalities within the same network infrastructure.

Hall et al. (2023) emphasized the integration of deep learning at the physical layer to adapt THz communication systems dynamically, particularly in terms of error-correction and resource allocation (Hall et al. 2023). This aligns with our study's suggestion that machine learning could play a critical role in managing the complexity of THz environments. For instance, deep learning algorithms could be deployed to optimize IRS configurations dynamically, adjust modulation schemes based on environmental data, and predict optimal signal paths to reduce latency and power consumption. However, the challenge remains in developing models that can operate with the precision and speed required by THz systems in real-time.

While Huq et al. (2021) acknowledge the data rate advantages of THz communication in urban settings, they do not fully address the environmental challenges that limit its range. This study builds upon Huq's findings by illustrating how adaptive modulation and IRS can counteract high-humidity conditions, extending THz's applicability across more varied environments (Huq, Rodriguez, and Otung 2021).

Despite its promising potential, several limitations were identified in this study, echoing concerns raised by Akyildiz et al. (2022) regarding the practical challenges of THz communication (Akyildiz et al. 2022). First, atmospheric attenuation remains a significant barrier to THz wave propagation, particularly in high-humidity environments. As Pang (2023) noted, water vapor absorption is a well-known issue with THz frequencies, and our findings indicate that high-humidity conditions can reduce the SNR by as much as 12 dB, depending on frequency and distance (Pang 2023).

While IRS can partially address this by redirecting signals, other solutions, such as hybrid networks that integrate mmWave frequencies, may be necessary to ensure reliable connectivity in diverse environmental conditions. Another critical limitation lies in hardware capabilities. Current transceivers and antennas are not fully optimized for THz frequencies, as many conventional materials exhibit high power loss and inefficiency at these levels. Shehata et al. (2023) suggested that photonics-aided THz systems could provide more scalable and robust solutions for 6G, particularly when integrated with fiber optics (Shehata et al. 2023). While this approach is promising, photonic components often entail higher costs and compatibility issues with existing electronic infrastructures, raising concerns about scalability and commercial viability.

Driving energy usage for THz frequency operations proves to be an immense technical hurdle. The experimental results showed that energy efficiency decreases as the frequency increases particularly beyond 5 THz because power demands rise exponentially. A proper understanding of power-efficient hardware coupled with dynamic energy management systems becomes crucial for accommodating various requirements of high-frequency communications. THz systems must achieve additional enhancements to fulfill the sustainable criteria that will govern future 6G networks.

Integration of network topology, which merges THz and mmWave frequencies to reduce their technological limitations, should next focus of study. By means of adaptive modulation creation and deep learning integration for real-time network optimization, THz communication systems may become more resilient. Researchers need further research on graphene's properties in conjunction with topological photonics to create effectively working THz frequency devices.

When combined with THz communication systems, energy-harvesting technologies would eliminate power issues thereby enabling sustainable operations. If 6G technology is to fully realize, laws must provide necessary support for the development of 6G networks to mix innovations with THz spectrum allocation systems. THz communication will become clear as the main 6G basis with essential ultra-fast data transmission capacity for developing digital technologies.

## 6. Conclusions

Terahertz (THz) technology has been investigated as a crucial component of 6G networks due to its potential for rapid data transmission. Researchers have examined its susceptibility to environmental conditions, hardware-specific challenges, and significant power consumption constraints. Research simulations and theoretical modeling indicate that THz communication technology can efficiently achieve data speeds exceeding several terabits per second. This makes it suitable for 6G applications requiring high bandwidth, such as real-time holography, massive IoT networks, and augmented reality immersion features. However, the scalability of THz communication necessitates addressing several technological challenges to render it a practical option.

The primary obstacle to THz wave propagation is strong environmental absorption, particularly in high humidity conditions, which degrades transmission quality. Under Non-Line-of-Sight (NLOS) scenarios, THz wave absorption by ambient water vapor restricts operational distances and diminishes signal quality. Although Intelligent Reflecting Surfaces (IRS) combined with enhanced modulation techniques have shown limited effectiveness in mitigating these stability challenges, further advancements are required for broader environmental deployment. Additionally, the hardware limitations of THz communication continue to pose significant challenges. Alongside energy system efficiency, the high-power loss associated with THz frequencies in existing materials adversely affects system performance. According to the literature, economically viable production techniques for graphene and photonic components are essential to overcome these operational constraints.

Research findings reveal an interaction between power efficiency performance metrics and information speed, as measured by system responsiveness. High-frequency signals enhance transmission speed and reduce round-trip time; however, their power consumption becomes significant when operated over long distances. The development of power management systems that automatically adapt their operations based on different application requirements and environmental factors presents a promising area for further research. Hybrid power allocation across the THz band and the mmWave network enables operators to optimize system performance without exceeding budgetary constraints for energy costs.

The future development of THz communication necessitates research into multiple technological areas to overcome existing implementation challenges. By integrating THz and mmWave frequencies, network systems can harness the benefits of both technologies, surpassing individual limitations. Dynamic signal modulation techniques and THz wave-specific coding methods could enhance signal integrity through improved environmental adaptation. Deep learning algorithms and artificial intelligence hold significant potential to optimize networks in real-time by adapting to continuously changing THz channel conditions.

Materials science and device engineering must focus on developing components that meet the specific requirements of THz frequencies. The exploration of topological photonics and reconfigurable intelligent surfaces offers potential tools for extending THz signal propagation and coverage capabilities. The advancement of efficient next-generation THz devices for network applications will rely on creating materials with adjustable performance attributes, low energy inputs, and high-frequency compatibility.

The main contribution of this research lies in its extensive evaluation of THz communication's dual operation between high-speed data rates and solutions to physical limitations and environmental challenges. By merging simulated data with theoretical insights, the research establishes directions for advancing THz communication while delineating current system boundaries. These findings contribute new knowledge to the field of THz technologies and guide future research efforts aimed at overcoming identified obstacles.

While THz communication faces numerous challenges, it holds transformative potential for wireless networks, significantly extending their capabilities. The future success of THz communication hinges on researchers devising effective solutions to address atmospheric propagation, power consumption, and hardware requirements. Multidisciplinary collaboration and innovation will drive THz technology to become an essential component for 6G and beyond, resulting in reliable and high-speed global communication systems.

## References

- Abdulameer, S. D., Taher, N. A., Alatba, S. R., Qasim, N. H., and Dorenskyi, O. (2024). Optimization of Underwater Channel Performance through Polar Code-OFDM Models. 2024 35th Conference of Open Innovations Association (FRUCT). <https://doi.org/10.23919/FRUCT61870.2024.10516418>.
- Ageyev, D., Yarkin, D., and Nameer, Q. (2014). Traffic aggregation and EPS network planning problem. 2014 First International Scientific-Practical Conference Problems of Infocommunications Science and Technology, 14-17 Oct. 2014. <https://doi.org/10.1109/INFOCOMMST.2014.6992316>.
- Akyildiz, I. F., Han, C., Hu, Z., Nie, S., and Jornet, J. M. (2022). Terahertz Band Communication: An Old Problem Revisited and Research Directions for the Next Decade. *IEEE Transactions on Communications*, 70 (6), 4250-4285. <https://doi.org/10.1109/TCOMM.2022.3171800>
- Chaccour, C., Soorki, M. N., Saad, W., Bennis, M., Popovski, P., and Debbah, M. (2022). Seven Defining Features of Terahertz (THz) Wireless Systems: A Fellowship of Communication and Sensing. *IEEE Communications Surveys & Tutorials*, 24 (2), 967-993. <https://doi.org/10.1109/COMST.2022.3143454>
- Chen, H., Sameddeen, H., Ballal, T., Wymeersch, H., Alouini, M. S., and Al-Naffouri, T. Y. (2022). A Tutorial on Terahertz-Band Localization for 6G Communication Systems. *IEEE Communications Surveys & Tutorials*, 24 (3), 1780-1815. <https://doi.org/10.1109/COMST.2022.3178209>
- Chen, Z., Han, C., Wu, Y., Li, L., Huang, C., Zhang, Z., Wang, G., et al. (2021). Terahertz Wireless Communications for 2030 and Beyond: A Cutting-Edge Frontier. *IEEE Communications Magazine*, 59 (11), 66-72. <https://doi.org/10.1109/MCOM.011.2100195>
- Chen, Z., Ma, X., Han, C., and Wen, Q. (2021). Towards intelligent reflecting surface empowered 6G terahertz communications: A survey. *China Communications*, 18 (5), 93-119. <https://doi.org/10.23919/JCC.2021.05.007>
- Chen, Z., Ma, X., Zhang, B., Zhang, Y., Niu, Z., Kuang, N., Chen, W., et al. (2019). A survey on terahertz communications. *China Communications*, 16 (2), 1-35. <https://doi.org/10.12676/j.cc.2019.02.001>
- Chen, Z., Ning, B., Han, C., Tian, Z., and Li, S. (2021). Intelligent Reflecting Surface Assisted Terahertz Communications Toward 6G. *IEEE Wireless Communications*, 28 (6), 110-117. <https://doi.org/10.1109/MWC.001.2100215>
- Faris, M., Jasim, I., and Qasim, N. (2021). PERFORMANCE ENHANCEMENT OF UNDERWATER CHANNEL USING POLAR CODE-OFDM PARADIGM. *International Research Journal of Science and Technology*, 3 (9), 55-62. [https://www.irjmets.com/uploadedfiles/paper/volume\\_3/issue\\_9\\_september\\_2021/15978/final/fin\\_irjmets1630649429.pdf](https://www.irjmets.com/uploadedfiles/paper/volume_3/issue_9_september_2021/15978/final/fin_irjmets1630649429.pdf)
- Hall, J., Jornet, J. M., Thawdar, N., Melodia, T., and Restuccia, F. (2023). Deep Learning at the Physical Layer for Adaptive Terahertz Communications. *IEEE Transactions on Terahertz Science and Technology*, 13 (2), 102-112. <https://doi.org/10.1109/TTHZ.2023.3237697>



- Hashim, N., Mohsim, A., Rafeeq, R., and Pyliavskiy, V. (2020). Color correction in image transmission with multimedia path. *ARPN Journal of Engineering and Applied Sciences*, 15 (10), 1183-1188.  
[https://www.arpnjournals.org/jeas/research\\_papers/rp\\_2020/jeas\\_0520\\_8215.pdf](https://www.arpnjournals.org/jeas/research_papers/rp_2020/jeas_0520_8215.pdf)
- Huq, K. M. S., Rodriguez, J., and Otung, I. E. (2021). 3D Network Modeling for THz-Enabled Ultra-Fast Dense Networks: A 6G Perspective. *IEEE Communications Standards Magazine*, 5 (2), 84-90.  
<https://doi.org/10.1109/MCOMSTD.001.2000048>
- Li, K., and Yu, J. (2022). Photonics-Aided Terahertz-Wave Wireless Communication. *Journal of Lightwave Technology*, 40 (13), 4186-4195.  
<https://doi.org/10.1109/JLT.2022.3161878>
- Makarenko, A., Qasim, N., Turovsky, O., Rudenko, N., Polonskyi, K., Govorun, O. (2023). Reducing the Impact of Interchannel Interference on the Efficiency of Signal Transmission in Telecommunication Systems of Data Transmission Based on The Ofdm Signal. *Eastern-European Journal of Enterprise Technologies*, 9 (121), 82–93. <https://doi.org/10.15587/1729-4061.2023.274501>
- Mumtaz, S., Jornet, J., Aulin, J., Gerstacker, W., Dong, X., & Ai, B. . (2017). Terahertz Communication for Vehicular Networks. *IEEE Transactions on Vehicular Technology*, 66 (7), 5617-5625. <https://doi.org/10.1109/TVT.2017.2712878>
- O'Hara, J. F., Ekin, S., Choi, W., and Song, I. (2019). A Perspective on Terahertz Next-Generation Wireless Communications. *Technologies*, 7 (2).  
<https://doi.org/10.3390/technologies7020043>.
- Pang, Y. (2023). Review on 6G-oriented terahertz communication channel. *Journal of Physics: Conference Series*, 2649 (1), 012053.  
<https://doi.org/10.1088/1742-6596/2649/1/012053>
- Polese, M., Jornet, J. M., Melodia, T., and Zorzi, M. (2020). Toward End-to-End, Full-Stack 6G Terahertz Networks. *IEEE Communications Magazine*, 58 (11), 48-54.  
<https://doi.org/10.1109/MCOM.001.2000224>
- Raza, A., Ijaz, U., Ishfaq, M. K., Ahmad, S., Liaqat, M., Anwar, F., Iqbal, A., et al. (2022). Intelligent reflecting surface-assisted terahertz communication towards B5G and 6G: State-of-the-art. *Microwave and Optical Technology Letters*, 64 (5), 858-866. <https://doi.org/10.1002/mop.33185>
- Sarieddeen, H., Alouini, M. S., and Al-Naffouri, T. Y. (2021). An Overview of Signal Processing Techniques for Terahertz Communications. *Proceedings of the IEEE*, 109 (10), 1628-1665. <https://doi.org/10.1109/JPROC.2021.3100811>
- Sarieddeen, H., Saeed, N., Al-Naffouri, T. Y., and Alouini, M. S. (2020). Next Generation Terahertz Communications: A Rendezvous of Sensing, Imaging, and Localization. *IEEE Communications Magazine*, 58 (5), 69-75.  
<https://doi.org/10.1109/MCOM.001.1900698>
- Serghiou, D., Khalily, M., Brown, T. W. C., and Tafazolli, R. (2022). Terahertz Channel Propagation Phenomena, Measurement Techniques and Modeling for 6G Wireless Communication Applications: A Survey, Open Challenges and Future Research Directions. *IEEE Communications Surveys & Tutorials*, 24 (4), 1957-

1996. <https://doi.org/10.1109/COMST.2022.3205505>
- Shafie, A., Yang, N., Han, C., Jornet, J. M., Juntti, M., and Kürner, T. (2023). Terahertz Communications for 6G and Beyond Wireless Networks: Challenges, Key Advancements, and Opportunities. *IEEE Network*, 37 (3), 162-169. <https://doi.org/10.1109/MNET.118.2200057>
- Shehata, M., Wang, Y., He, J., Kandeepan, S., and Wang, K. (2023). Optical and Terahertz Wireless Technologies: the Race to 6G Communications. *IEEE Wireless Communications*, 30 (5), 10-18. <https://doi.org/10.1109/MWC.001.2300138>
- Song, H. J., and Lee, N. (2022). Terahertz Communications: Challenges in the Next Decade. *IEEE Transactions on Terahertz Science and Technology*, 12 (2), 105-117. <https://doi.org/10.1109/TTHZ.2021.3128677>
- Taghvaei, H., Pitilakis, A., Tsilipakos, O., Tasolamprou, A. C., Kantartzis, N. V., Kafesaki, M., Cabellos-Aparicio, A., et al. (2022). Multiwideband Terahertz Communications Via Tunable Graphene-Based Metasurfaces in 6G Networks: Graphene Enables Ultimate Multiwideband THz Wavefront Control. *IEEE Vehicular Technology Magazine*, 17 (2), 16-25. <https://doi.org/10.1109/MVT.2022.3155905>
- Wang, C. X., Wang, J., Hu, S., Jiang, Z. H., Tao, J., and Yan, F. (2021). Key Technologies in 6G Terahertz Wireless Communication Systems: A Survey. *IEEE Vehicular Technology Magazine*, 16 (4), 27-37. <https://doi.org/10.1109/MVT.2021.3116420>
- Yang, F., Pitchappa, P., and Wang, N. (2022). Terahertz Reconfigurable Intelligent Surfaces (RISs) for 6G Communication Links. *Micromachines*, 13 (2). <https://doi.org/10.3390/mi13020285>.
- Yang, N., and Shafie, A. (2024). Terahertz Communications for Massive Connectivity and Security in 6G and Beyond Era. *IEEE Communications Magazine*, 62 (2), 72-78. <https://doi.org/10.1109/MCOM.001.2200421>
- Yang, Y., Yamagami, Y., Yu, X., Pitchappa, P., Webber, J., Zhang, B., Fujita, M., et al. (2020). Terahertz topological photonics for on-chip communication. *Nature Photonics*, 14 (7), 446-451. <https://doi.org/10.1038/s41566-020-0618-9>
- You, X., Wang, C.-X., Huang, J., Gao, X., Zhang, Z., Wang, M., Huang, Y., et al. (2020). Towards 6G wireless communication networks: vision, enabling technologies, and new paradigm shifts. *Science China Information Sciences*, 64 (1), 110301. <https://doi.org/10.1007/s11432-020-2955-6>
- Yu, J., Wang, Y., Ding, J., Zhang, J., Li, W., Wang, F., Wang, C., et al. (2023). Broadband Photon-Assisted Terahertz Communication and Sensing. *Journal of Lightwave Technology*, 41 (11), 3332-3349. <https://doi.org/10.1109/JLT.2023.3252821>