

Drone-Assisted Network Maintenance as a Revolutionizing Telecom Infrastructure

Hamid Alshareefi

Al-Turath University, Baghdad 10013, Iraq.

Email: hamid.alshareefi@uoturath.edu.iq

Bassam H. Habib

Al-Mansour University College, Baghdad 10067, Iraq.

Email: bassam.habib@muc.edu.iq

Ismailov Imetkul Dzhanybaevich (Corresponding author)

Osh State University, Osh City 723500, Kyrgyzstan.

Email: iismailov@oshsu.kg

Nameer Hashim Qasim

Al-Rafidain University College Baghdad 10064, Iraq.

Email: nameer.qasim@ruc.edu.iq

Jamal Alsaidi

Madenat Alelem University College, Baghdad 10006, Iraq.

Email: jamal.kadhom@mauc.edu.iq

| Received: 2025 | Accepted: 2025

Abstract

Background: Telecommunication infrastructure requires regular maintenance and upkeep for its networks' matrices, but existing approaches have been associated with issues such as time consumption and concern costs, as well as safety hazards. Newer developments in drone technology present progressive opportunity through the improvement of current maintenance processes by means of automation, predictability, and real time computation.

Objective: The article seeks to assess whether the use of drone in telecommunication maintenance enhances the operational productivity through increasing the efficiency, reducing cost, safety, environmental and scalability and in different terrains.

Methods: The methods followed included the conduct of experimental surveys with drone operations in five different telecommunication settings. These areas of interest were inspection efficiency, the accuracy of condition-based

Iranian Journal of
**Information
Processing and
Management**

Iranian Research Institute
for Information Science and Technology
(IranDoc)

ISSN 2251-8223

eISSN 2251-8231

Indexed by SCOPUS, ISC, & LISTA

Special Issue | Summer 2025 | pp.1309-1339

<https://doi.org/10.22034/jipm.2025.728428>



maintenance, signal received signal power, delay reduction through edge computing, and energy consumption. Sophisticated numerical computations, like Kalman filters and various frameworks of edge computing, were used in this context to draw analytical insights on the collected data.

Results: The methods that used drones lowered the time needed for inspections by ¼ and cut the expenses by 49.3% and increased safety and quality of the coverage. Predictive maintenance was found to have achieved 89.7% accuracy with the system response time being 246ms at different site. The results of energy consumption model depicted the errors under 2% confirming this approach's suitability for operational planning.

Conclusion: By evaluating the applicability of drones in telecoms maintenance, the paper shows that the notion of drones in this context is promising both now and in the future. These results signal existing and potential applications of drones is to incorporate drone technology into infrastructural management solutions to address emerging needs in the industry.

Keywords: Drones, Telecommunications, Network Maintenance, UAV, 5G, Infrastructure, Automated Inspection, Cost Reduction, AI Integration, Predictive Maintenance.

1. Introduction

Modern telecommunication industry as an environment with high rates of innovations, is exposed to constant pressure of growing requirements to the quality and speed of connections. Existing approaches for maintenance technologies rely on manual inspection and physical effort which is time-consuming and poses several constraints such as; accessibility, cost and safety. More recently, one of the emerging technologies revolutionizing the solution that has been noticed and implemented in the sector is in the use of the drones in infrastructure maintenance. Telecommunication can be advanced by drones or unmanned aerial vehicles (UAVs) given the fact they are capable of handling tasks which could have been complex difficult and expensive in the past (Kurt et al. 2021).

Drones are used in telecommunications to attract attention for their potential to perform self-survey of assets like cell towers and fiber optic networks. This capability is especially beneficial for locations that can only be accessed with great effort by a maintenance team and where it is otherwise required that specialists climb to great heights or venture into dangerous terrains. As mentioned above, drones are capable of being fitted with high-definition cameras, thermal imaging and other instruments that can offer detailed information of the condition of specific network assets and specific

feedback in real time (Jacobsen et al. 2023). Through its capability to eradicate the necessity for manual inspections, cost effective aerospace can immense reduction on time unnecessary for regular maintenance and append significant amount of expense for unlevelled maintenance.

However, on the positive side, drones help telecommunications companies not only to solve current operational issues but also to strengthen the approach based on predictive analytics on equipment condition (Qasim et al. 2022). Use of AI and ML can have the actual data processed through drones to have instances of fault detected and enumerated before they become serious problems. It will facilitate the precise realization of proactive maintenance schemes, which has the potential to enhance the life cycle of the network equipment, and reduce the occurrences of unscheduled breakages (Guirado et al. 2021). Also, the use of drones ensures that large quantities of data are collected at once, which in turn improves the quality of data collected, decision making and operational planning for the telecommunications providers (Mauro, Floriano De, and Shamim 2023).

Telecommunications are also adopting drones as a way of enhancing their 5G technology since this need's infrastructure enhancement, and maintenance frequently. Inspections may involve monitoring of wireless sites which can be done by drones; this can help the 5G networks to be deployed faster; also, with the help of drones, network planning can be enhanced; the collection of data indicating the degree of coverage provided and wireless performance can also be improved (Qasim and Jawad 2024). For instance, telecom operators from United States used drone to check the towers damaged by calamities while deutsche Telekom, a European company, enhances its ability to monitor the health of its network through the use of drone (Amponis et al. 2022). Such examples prove that next generation telecommunication infrastructure can be complemented by drones, and also improve the existing practices of maintaining social infrastructures (Qasim and Natalia).

Although there are so many benefits of drones in constructing telecom facilities, there are challenges that ensue when using them. Recorded deliveries are limited by rules governing the areas of airspace over which drones can fly, licensing of pilots, and data privacy and security (Fatah and Qasim 2022). Solving these issues calls for concerted efforts from the telecommunications operators, technology vendors and regulatory authorities

to put in place policies that support integrated relevant safe and responsible drone operations. Moreover, personnel aspect requires telecommunications providers to develop a new generation of workforce suitable for operating the new technologies such as drones (Shayea et al. 2022).

Entailing the future, drones are expected to assume the role of effective commodity as far as telecommunications infrastructure maintenance is concerned, especially in the future when up and coming technology is taken into account. Adding other new technologies like the Internet of Things (IoT) to drone technologies is said to increase their capabilities (Qasim et al. 2024). Smart drones that interact with the IoT can be used to monitor the parts of the network to generate immediate schedules for the maintenance that corresponds to the actual state of the equipment. Furthermore, due to the possibility of providing preliminary assessment and temporary communication connection during natural disasters it can be stated that drones have the potential to being used to support telecommunications resilience in terms of emergency (Abualigah et al. 2021).

Telecommunication aided through drones is a giant step in trying to make the industry more effective, efficient, and safe relative to the current techniques used. With the growing evolution of digital technologies in the telecom industry, drones shall remain a key strategic enabler in the ongoing evolution of telecoms networks in a connected world.

1.1. Aim of the Article

This article aims to explore the revolutionary characteristics of using drones in network maintenance within the telecommunications sector. As telecommunication infrastructure evolves to support new digital networks, such as 5G and its successors, it faces significant challenges and expenses, particularly when infrastructure must be installed in remote and hazardous areas. Traditional maintenance approaches significantly limit centralized management and fail to meet the demands for active network status monitoring and the swift execution of resulting tasks. Drones, equipped with advanced sensor technology and artificial intelligence (AI), present a groundbreaking solution for telecom networks by enabling remote inspection, preventive, and predictive maintenance, which are essential for network functionality and reliability.

The article seeks to examine how the use of drones can significantly

improve telecom network infrastructure management, impacting expenses, downtime probability, and the safety of laborious maintenance operations. Drones, enhanced with AI and machine learning, can conduct thorough inspections, capture high-quality data, and detect emerging issues before they become serious flaws. Additionally, the article aims to establish the efficiency of drone-assisted maintenance, the costs incurred, and the reliability improvements compared to conventional maintenance methods.

Furthermore, the study aims to identify the challenges that adopting drone technology presents in the telecommunications industry. These challenges include regulatory hurdles, privacy concerns, skilled personnel requirements, and efficient data analysis systems. The article also discusses future directions, examining how AI and drone technology will extend their application range in the telecommunications industry beyond simple maintenance, including emergency response, new network development, and environmental monitoring. This article provides a comprehensive literature review on drone-assisted network maintenance, contributing to the scientific discourse on viable and innovative solutions in telecommunications infrastructure management, and demonstrating how drones will be fundamental for the future of telecom network maintenance.

1.2. Problem Statement

The primary challenge in the telecommunications sector lies in managing the vast and complex networks that are fundamental to providing efficient and reliable services. As the industry transitions to advanced networks such as 5G and eventually 6G, maintenance requirements have increased in both frequency and complexity. Traditional approaches to network maintenance involve physical examination and repair, exposing technicians to hazardous environments, including remote terrains and extreme temperatures, and incurring significant operational costs. Moreover, these conventional methods are inefficient in delivering instantaneous information and prognoses that are crucial for avoiding network downtimes and ensuring service availability. Consequently, the lack of effective, affordable, and preventive maintenance solutions that meet the needs of telecom operators remains a critical issue.

Recent technological advancements in Unmanned Aerial Vehicles (UAVs) or drones offer a novel approach to mitigating these maintenance challenges. High-altitude inspections, thermal scanning, and radiofrequency (RF)

analysis are among the roles drones can perform, reducing the need for technicians to physically access hard-to-reach areas. Furthermore, the integration of drones with artificial intelligence (AI) and machine learning enables automatic data processing, facilitating near real-time monitoring of network health and potential crash scenarios for telecom companies. However, several challenges hinder the widespread adoption of drones in telecom maintenance, including stringent regulatory policies, insufficient data privacy measures, and the high capital investment required for advanced technologies and skilled personnel.

This article aims to address the underutilization and incorporation of drones in network inspection and repair within the telecommunications industry. It examines the qualitative contributions of drones in overcoming robust maintenance challenges, enhancing operational efficiency, and reducing costs. Additionally, the article identifies the barriers telecom firms must overcome to effectively utilize drones. To this end, the discussion focuses on the implications of drone usage in maintaining telecom infrastructure and provides strategic recommendations for the industry to move towards technological solutions for maintenance.

2. Literature Review

Telecom industry infrastructure management is benefiting immensely from drone innovations in terms of efficiency, accessibility, and flexibility in diverse network conditions. This systematic literature review presents recent research trends in UAV-based maintenance management, analyzes existing research gaps, and suggests approaches to address these challenges, thus providing a comprehensive perspective of this emerging research domain.

Drones have proven impressive in solving significant problems in telecom, such as supply chain management, optimization, energy utilization, and network flexibility. Silva et al. (2023) demonstrated how drones could improve network coverage and efficiency while minimizing energy usage in aerial base stations through resource management (Silva, Torres, and Cardoso 2023). Similarly, Heidari et al. (2023) highlighted the role of machine learning (ML) in enhancing predictive maintenance and autonomy for drone systems, supporting the functionality of the Internet of Drones (IoD) (Heidari et al. 2023).

In a related study, Qu et al. (2023) discussed the deployment of multiple

drones in disaster response and underscored the importance of green and power-conscious networking (Qu et al. 2023). This complements the work of Angjo et al. (2021) proposed management of handover in 6G networks but failed to illustrate the interconnection between mobility management and latency optimization. Together, these studies emphasize the synergy between energy efficiency, network stability, and mobility control in the context of drones (Angjo et al. 2021).

Drones are also utilized in infrastructure inspection and design. Edelman et al. (2023) examined specific designs of airports for autonomous drones to integrate them more effectively into existing facilities (Edelman et al. 2023). This aligns with the findings of Nooralishahi et al. (2022), who demonstrated that texture analysis could complement multimodal surveys used in critical structures fault detection (Nooralishahi et al. 2022). Additionally, Lee et al. (2024) proposed maintenance strategies based on performance detection through the incorporation of a Kalman filter in the quadcopter motor, correlating infrastructure efficiency with optimal drone performance (Lee et al. 2024).

In smart city networks, Alsamhi et al. (2023) described how drones can enhance signal intensity and proactive connection to IoT systems (Alsamhi et al. 2023). Shah and Dave (2023) expanded on this view by assessing the potential integration of drone technology with robotic solutions for telecom tower maintenance, offering a consolidated perspective on automating maintenance-related tasks (Shah and Dave 2023). Collectively, these studies highlight the promise of drones in strengthening networks while reimagining infrastructure potential.

However, several barriers have yet to be fully addressed, as elaborated in the following section. Silva et al. (2023) pointed out that drones still suffer from limited energy autonomy, reducing their working range and performance (Silva, Torres, and Cardoso 2023). Heidari et al. (2023) called for the development of ML-based IoD systems, noting the scarcity of real implementations, which raises questions about the IoD's future potential (Heidari et al. 2023). Qu et al. (2023) echoed these concerns, highlighting inefficiencies in coordinating multi-drone systems in dynamic environments (Qu et al. 2023).

Similarly, Angjo et al. (2021) noted the need for further investigation into achieving perfect handover in high-speed 6G networks, as predictive models

and routing algorithms to support these networks are still unknown (Angjo et al. 2021). Criticisms from an infrastructure perspective were noted by Nooralishahi et al. (2022) and Edelman et al. (2023), regarding issues with sensor stability and suboptimal performance in varying conditions (Nooralishahi et al. 2022; Edelman et al. 2023). Shah and Dave (2023) also observed that, despite advancements in both drones and ground robots, a lack of cooperation between the two systems hinders the achievement of fully autonomous maintenance systems (Shah and Dave 2023).

To address these obstacles, the utilization of renewable power sources and edge computing frameworks, as proposed by Koubaa et al. (2023), could significantly enhance drone automation (Koubaa et al. 2023). Supervised learning, employed with an online decision module suggested by Heidari et al. (2023), integrates reinforcement learning to enable drones to make suitable choices based on environmental conditions (Heidari et al. 2023).

Homayouni et al. (2022) highlighted the need for efficient protocols for multi-drone coordination to standardize processes and improve performance (Homayouni et al. 2022). Techniques such as the Kalman filter, proposed by Lee et al. (2024), could further reduce maintenance time by predicting performance declines (Lee et al. 2024).

Integrating drones with robotics represents a multimodal system for telecom infrastructure maintenance, as advocated by Shah and Dave (2023). Such integration may lead to input-output fault detection and auto-generation and repair systems, addressing existing challenges in scalability and flexibility (Shah and Dave 2023).

Drone-aided network maintenance is poised to revolutionize telecom infrastructure efficiency, deployment coordination, and integration with existing and new systems. Further research is required on multilateral AI systems, green energy, and the establishment of acceptable norms and conventions for telecom drone operations to optimize maintenance. Closing these gaps will enable drones to become central to creating optimal, effective, green, and robust network structures.

3. Methodology

The study uses an integrated quantitative and qualitative research design to assess the possibility of the identified area of drone application in modernizing telecommunications infrastructure. It combines methods of practical statistical

experimental planning, data collection and elaboration, and prognosis as well as validation supported by state-of-the-art math modeling for meeting the goals in the area of inspection rate, network coverage, and prognosticated maintenance. The research complies with similar methods applied in prior studies by Kurt et al. (Kurt et al. 2021), Jacobsen et al. (Jacobsen et al. 2023), as well as Guirado et al. (Guirado et al. 2021) to provide a comprehensive theoretic framework for the evaluation.

3.1. Research Design

The research focuses on the effectiveness of inspection, real-time monitoring, and predictive maintenance capabilities of drones. Surveys were conducted with participants from ten field experiments carried out over two months in five different locations, including urban areas, rural areas, and regions frequently affected by disasters. These sites were deliberately chosen to capture the variability of environmental conditions, as recommended by Amponis et al. (2022) (Amponis et al. 2022).

The study engaged 20 engineers and technicians for operational testing and interviewed 15 key industry professionals to discuss the challenges and opportunities of operational drone technology. These interviews provided qualitative insights that supplemented the experimental results. Additionally, fifty technical reports were reviewed to identify recurrent issues with conventional maintenance techniques and to confirm the effectiveness of drones in enhancing maintenance processes, aligning with the findings of Shaye et al. (2022) (Shaye et al. 2022).

3.2. Experimental Setup

In terms of the methodology the actual network maintenance procedures were replicated with modern sophisticated drones and sensors in order to obtain precise data. The prime drone for operation was the DJI Matrice 300 RTK which was fitted with high-definition cameras, thermal imagery and LiDAR. These drones were fitted with 5G and Wi-Fi modules which lets these drones work on real-time data transfers and edge computing, according to Tropea et al. (Mauro, Floriano De, and Shamim 2023). The payload sensors included a thermal camera for observing structures in temperature ranges of -20°C to 150°C (Edelman et al. 2023), LiDAR for terrain modeling with an accuracy of $\pm 2\text{cm}$ (Nooralishahi et al. 2022); RF analyzers for signal strength

and studying signal coverage areas (Alsamhi et al. 2023).

Such an approach helps to achieve methodological reliability and constructiveness of the identified role of drones in the contemporary telecommunication.

3.3. Data Collection

Data collection for this study was conducted over a two-month period, encompassing 200 flight hours across five sites selected based on specified criteria. These sites were chosen to represent various environmental settings—urban, rural, and disaster-prone areas—thereby enhancing the generalizability of the results. The study focused on three key assessment parameters critical for network rehabilitation.

Structural inspections were performed using super high-resolution images and LiDAR scans of thirty telecom towers to assess the structural condition of the pylons. These advanced imaging techniques allowed for the early identification of wear and tear at structural levels, providing essential data to mitigate potential problems that could lead to catastrophic repairs or failures. LiDAR's mapping precision and coverage enabled the assessment of structural integrity and the detection of areas with potential signs of failure that might not be observed during standard inspections.

Network performance and signal strength variations were evaluated using Signal Strength Analysis to identify blind spots. RF signal measurements were taken at different heights, ranging from 50 meters to 200 meters, across 100 locations. This analysis enabled the identification of weak signal zones and provided practical recommendations for enhancing service continuity through network coverage installations.

Predictive maintenance data was collected to develop advanced algorithms capable of anticipating failures. These algorithms aimed to reduce the uncalculated hours of device downtime per year while simultaneously establishing maximum sustainable performance levels and material longevity.

The integration of drones with edge computing further minimized the process by enabling real-time data processing. As Amponis et al. (2022) pointed out, this approach reduced latency and improved the interactivity of maintenance-related transactions (Amponis et al. 2022). This method not only confirmed the benefits of using drones for network modernization but also validated the concept of applying drones to modernize the telecommunications sector.

3.4. Key Equations and Analytical Models

To analyze the collected data and corroborate the conclusions, the study employed various complex formulas and equations. This kind of approach provided accuracy and depended on essential fields for instance signal force, structure stability, prognosis, preservation, energy use, and delay.

1. Signal Propagation in RF Analysis

$$PL(d) = PL(d_0) + 10n \log_{10} \left(\frac{d}{d_0} \right) + X_\sigma \quad (1)$$

Where $PL(d)$ is the path loss at distance d ; $PL(d_0)$ is the reference path loss; n is the path loss exponent specific to each site, and X_σ represents the shadowing factor modeled as a Gaussian random variable. This model accurately identified coverage gaps, aligning with observations by Abualigah et al. (2021) (Abualigah et al. 2021).

2. LiDAR-Based Structural Integrity Analysis

The density of LiDAR points per square meter (D) was calculated as:

$$D = \frac{N \cdot \cos(\theta)}{A \cdot R^2 \cdot \Delta\phi \cdot \Delta\alpha} \quad (2)$$

Where D is density of LiDAR points per square meter; N is total number of LiDAR points captured; A is surface area of the structure being inspected; θ is incidence angle of the LiDAR beam relative to the structure's surface normal; R is distance between the LiDAR sensor and the target structure; $\Delta\phi$ is horizontal angular resolution of the lidar sensor (in radians); $\Delta\alpha$ is vertical angular resolution of the LiDAR sensor (in radians).

This model can be used to differentiate deformations between structures since it considers variations in point densities on surfaces. Low density regions may suggest the existence of obstacles, elements or geometrical complexities that need to be investigated. With this additional and sophisticated calculation, the assessment of structural condition is improved furthering maintenance planning and decision making.

This equation makes LiDAR point distribution more detailed and should provide a solid base for future university and industrial investigations of telecommunication structures maintenance.

3. Kalman Filter for Predictive Maintenance

Fault prediction leveraged the modified Kalman Filter Algorithm, with prediction and update steps as follows:

Predict the State Estimate:

$$\hat{X}_{t|t-1} = A\hat{X}_{t-1} + BU_t \quad (3)$$

This equation predicts the state of the system ($\hat{X}_{t|t-1}$) at the current time (t), given the state at the previous time ($t - 1$); \hat{X}_{t-1} the known or estimated state at the previous step; A the state transition matrix, which describes how the system evolves over time in the absence of external forces; B the control matrix, which translates external inputs (U_t) into effects on the system. This step models how the system behaves naturally and predicts its next state.

Predict the Error Covariance:

$$P_{t|t-1} = AP_{t-1}A^T + Q \quad (3)$$

This equation predicts the uncertainty (error covariance) of the state estimate. P_{t-1} the uncertainty in the state estimate at the previous time step; A^T the transpose of the state transition matrix, used for matrix multiplication to account for how uncertainties propagate; and Q the process noise covariance, representing uncertainties in the system model or random disturbances. This step predicts how uncertain we are about the system's state based on the model and any noise in the system.

Update. Calculate the Kalman Gain:

$$K_t = P_{t|t-1}H^T(HP_{t|t-1}H^T + R)^{-1} \quad (4)$$

Here K_t is the Kalman Gain, which decides how much weight to give to the predicted state versus the measured state; $P_{t|t-1}$ the predicted uncertainty from the previous step; H the observation matrix, which maps the state estimate to the measurement space; H^T the transpose of H , used in matrix multiplication; R the measurement noise covariance, representing uncertainties in the observations; $HP_{t|t-1}H^T + R$ the total uncertainty in the measurement, combining both the predicted uncertainty and the observation noise.

The Kalman Gain ensures that the update optimally balances the trust between the predicted model and the actual measurements.

Update the State Estimate:

$$\hat{X}_t = \hat{X}_{t|t-1} + K_t(Z_t - H\hat{X}_{t|t-1}) \quad (4)$$

Here \hat{X}_t the updated state estimate at the current time step; $\hat{X}_{t|t-1}$ the predicted state from the prediction step; Z_t the actual measurement from sensors or observations; $H\hat{X}_{t|t-1}$ the predicted measurement, based on the predicted state; $Z_t - H\hat{X}_{t|t-1}$ the measurement residual (also called the innovation), which is the difference between the actual and predicted

measurements.

This equation adjusts the predicted state by incorporating new measurements and weighing them according to the Kalman Gain.

Update the Error Covariance:

$$P_t = (I - K_t H) P_{t|t-1} \quad (4)$$

Where P_t the updated error covariance, representing the uncertainty of the new state estimate; I the identity matrix, which ensures proper scaling; $K_t H$ the correction factor that updates the error covariance. This step ensures that the uncertainty of the state estimate is reduced after incorporating the new measurement.

4. Energy Consumption Model

Drone energy efficiency was evaluated using the Battery Depletion Rate Equation:

$$E(t) = E_0 - \int_0^t P(t) dt \quad (4)$$

Where $E(t)$ remaining energy in the drone's battery at time t ; E_0 initial battery capacity at the start of operation; $P(t)$ instantaneous power consumption rate of the drone at time t .

This model considers the energy consumption by the drone's propulsion system and payload sensors, communication modules, and onboard processing units constantly in use. The integration stores the total energy use over time and is able to provide a very accurate measure of energy remaining at any point during the flight.

The power consumption rate, $P(t)$, was further decomposed to reflect different operational components:

$$P(t) = P_{propulsion} + P_{sensors} + P_{communication} + P_{processing} \quad (4)$$

Where $P_{propulsion}$ power used by motors for lift and maneuvering, influenced by payload weight and environmental conditions, like wind; $P_{sensors}$ power required to operate high-resolution cameras, LiDAR, and thermal imaging systems; $P_{communication}$ power consumed by 5G and Wi-Fi modules for real-time data transmission; $P_{processing}$ energy used by onboard edge computing systems for data processing and analytics.

The analysis confirmed that incorporating energy-efficient sensors and the best communication protocols considerably enhances endurance. These findings resonate with Silva et al. (2023) argue that the optimization is a factor best understood by distinguishing between performance and energy

optimization to get longer flight while functioning appropriately (Silva, Torres, and Cardoso 2023). This model allows energy control to be in advance, and assist in mission planning with clear energy requirements.

5. Latency in Edge Computing

Latency in real-time data processing was modeled as:

$$T_{total} = T_{transmission} + T_{processing} + T_{response} \quad (4)$$

Where T_{total} is total latency experienced in real-time operations; $T_{transmission}$ is time taken to transmit data from the drone to the edge server; $T_{processing}$ is time required for the edge server to process incoming data; $T_{response}$ is time for the processed results to be transmitted back to the drone.

The latency model highlights the key stages of data flow during drone-assisted operations, with each component contributing to overall system performance. By employing edge computing, significant reductions in $T_{transmission}$ and $T_{response}$ were observed compared to traditional cloud-based processing.

Applying edge computing cut the average total latency to 250 milliseconds, and this improvement facilitated the drone's operation in the conditions, where fast decisions depending on the current situation are crucial. This improvement echoes with the results observed by Koubâa et al. to consider localized data processing the main factor that reduces latency. It is most evident in real time object detection, predictive maintenance of autonomous navigation applications (Koubaa et al. 2023).

3.5. Validation

To ensure methodological rigor, this study incorporated multiple validation steps across key domains: inspection accuracy, energy efficiency, latency optimization, and predictive maintenance. Each step was supported by experimental data and cross-referenced with established studies to enhance the reliability of findings and align with best practices in drone-assisted telecommunications maintenance.

Inspection accuracy was validated using multi-modal analysis techniques, combining LiDAR and high-resolution imaging to assess structural integrity. This approach aligns with Nooralishahi et al. (2022) emphasized the role of texture analysis in enhancing infrastructure inspections (Nooralishahi et al. 2022). The integration of autonomous navigation, as outlined by Jacobsen et al. (2023) further strengthened the reliability of inspections, ensuring precise

fault detection (Jacobsen et al. 2023). Communication models were benchmarked against the StratoTrans framework by Guirado et al. (2021), which demonstrated the effectiveness of drone-based 4G communication for monitoring linear infrastructure (Guirado et al. 2021).

Energy efficiency validation focused on comparing the modeled battery depletion rates with Silva et al. (2023) proposed energy-efficient resource allocation for aerial base stations (Silva, Torres, and Cardoso 2023). The findings were consistent, confirming the model's accuracy. Additionally, this study referenced Qu et al. (2023), whose work on multi-drone coordination provided further support for the energy optimization strategies implemented (Qu et al. 2023).

Latency optimization was achieved through edge computing, with results closely mirroring the 250ms latency reported in the AERO framework by Koubâa et al. (2023) (Koubaa et al. 2023). This validation was reinforced by comparisons with Homayouni et al. (2022) studied 3GPP-based latency in low-altitude drone operations, ensuring robustness in real-time maintenance scenarios (Homayouni et al. 2022).

Predictive maintenance, leveraging a Kalman filter algorithm, achieved 88.5% accuracy, aligning with the prognostic's framework of Lee et al. (2024). These validations collectively underscore the methodological soundness and transformative potential of drone-assisted telecommunications maintenance (Lee et al. 2024).

4. Results

4.1. Inspection Efficiency Improvements

Deploying drones in the inspection of telecommunication structures provides the innovative opportunity in the management and maintenance of structures in difficult terrains and conditions. The particular site inspections were performed on 30 telecoms towers at five dissimilar test sites that contained a mixture of urban, rural, and remote regions. These inspections compared the effectiveness, safety, cost and coverage of using drone-supported approach to the conventional manpower-controlled approach. More specific metrics like average area inspected per drone, number of personnel participating in the process, and effectiveness of minimizing downtime give a better way of analyzing the benefits of drone than passing a general judgment that recalls the performance of unmanned aerial vehicles only as inspection equipment.

The detailed results are presented in Table 1 below where additional metrics and data for every location have been provided.

Table 1. Comparison of Inspection Methods Across Locations

Location	Inspection Method	Avg. Time (minutes)	Avg. Cost (USD)	Safety Rating*	Coverage Quality**	Avg. Area Covered (sq. km)	Personnel Required	Downtime Reduction (%)	Time Reduction (%)	Cost Reduction (%)
Central City Hub	Manual	70	500	Moderate	High	0.5	5	0	0	0
Central City Hub	Drone-Assisted	15	150	High	High	0.5	2	80	78	70
Suburban Tower Zone	Manual	55	450	Moderate	Moderate	0.4	4	0	0	0
Suburban Tower Zone	Drone-Assisted	10	135	High	Moderate	0.4	2	85	82	70
Coastal Maintenance	Manual	70	600	Low	Moderate	0.6	6	0	0	0
Coastal Maintenance	Drone-Assisted	20	180	High	Moderate	0.6	2	76	71	70
Mountainous Region	Manual	75	700	Low	Low	0.3	7	0	0	0
Mountainous Region	Drone-Assisted	18	200	High	Low	0.3	2	78	76	71
Disaster Response Site	Manual	90	800	Low	Low	0.4	8	0	0	0
Disaster Response Site	Drone-Assisted	25	250	High	Low	0.4	2	79	72	69

The information presented in the Table 1 below clearly outlines the broad benefits of employing drones for inspection processes. Moreover, the use of drones was also found to have greatly minimized the overall inspection time by about 75% across all the locations, although more variation was noted in suburban tower zones with 82 %time's reduction being realized. Consequently, cost reduction tended to be 70%; slightly superior in the

mountainous region with 71%; particularly because the area entails many operational costs with frequent manual check-ups.

Evaluating the safety aspects of drone operations, it was proven that all locations went up from Low or Moderate to High, by utilizing drone-aided techniques. This change is due to the fact that there are numerous situations where personnel no longer have to undertake dangerous operations, for instance, in areas affected by disasters, or in the mountains. Also, regarding issues of coverage quality, the more conventional inspections sustained or even increased the coverage extent per session, which stayed fairly uniform at 0.4 – 0.6 km² regardless of technique.

Some way demands also recorded steep reductions in personnel demands where drone glasses' inspection only involved 2 people on average, while traditional methods required 5-8 people. This helped also to cut down on the number of personnel, which obviously affected the overall operational costs and such aspects as the down time which rarely was more than 20% on average. The efficiency and practicality of the drones in various circumstances were obvious at this point.

4.2. Signal Strength Analysis Across Altitudes

To evaluate the RF signal strength, the study aimed at measuring the signal strength at different heights (50-200 meters) from five Telkom telecommunications sites to determine weak points of the network and ways of their improvement. UAVs along with RF analyzer offer high accurate and height-specific number of measurements that were crucial for the understanding of spatial distribution and loss. This analysis was meant to help improve the orientations of the antennas as well as the general network layout in order to increase dependability of appearing covers across various terrains. More metrics in form of signal variability and the coverage loss per meter provide a detailed insight of signal behavior at higher altitudes or specific locations.

Table 2. Signal Strength Analysis Across Altitudes

Altitude (m)	Central City Hub (dBm)	Suburban Zone (dBm)	Coastal Site (dBm)	Mountainous Region (dBm)	Disaster Response Site (dBm)	Signal Variability (\pm dBm)	Coverage Quality
50	-60	-65	-68	-70	-72	5	Good
100	-65	-70	-75	-78	-80	7	Moderate
150	-70	-78	-82	-85	-88	10	Poor
200	-75	-83	-87	-90	-92	12	Poor

The information provided in Table 2 clearly reflects that altitude has a direct bearing on the strength of the RF signal in various geographical regions. The test showed that signal strength was weakest in the mountainous area which was also the location of the simulated disaster, reducing from -70 dBm at 50 meters to below -90 dBm at 200 meters. This steep drop demonstrates the difficulty in sustaining a stable signal in regions of topographic or environmental interference.

Variability characteristics of the signal elevation were proportional to the altitude, from ± 5 dBm at 50 meters to ± 12 dBm at 200 meters. This variation is likely a result of the fact that RF attenuation and stability is more dynamic for lower altitude aerial platforms helpful where little ground reflection is present and atmospheric interference is minimized. Such discoveries are especially important in the mountainous regions and other disaster-prone regions where service always is very crucial in its operations including during natural disasters.

In the study, tabulated quantitatively, the coverage quality reduced by altitude across all the sites. However, Good coverage was achieved best at 50 meters, but the coverage reduced to Moderate at 100 meters, while at 150 meters and 200 meters it was rated to be Poor. This trend underlines the importance of tuning various aspects of the equipment location and signal processing in areas that might pose certain challenges to signal transmission.

4.3. Accuracy of Predictive Maintenance Algorithms

The associated predictive maintenance algorithm used a variant of the Kalman filter to predict likely failures in telecommunication equipment. This proved quite efficient in detecting areas of faults in earlier times, thus helping to prevent fault related quick service supports. Using this test, algorithm performance was evaluated in five different locations characterized by

different environmental and operational conditions. To further assess the algorithm, other metrics such as false positive rate, mean time to detection (MTTD) and fault prediction lead time were also used.

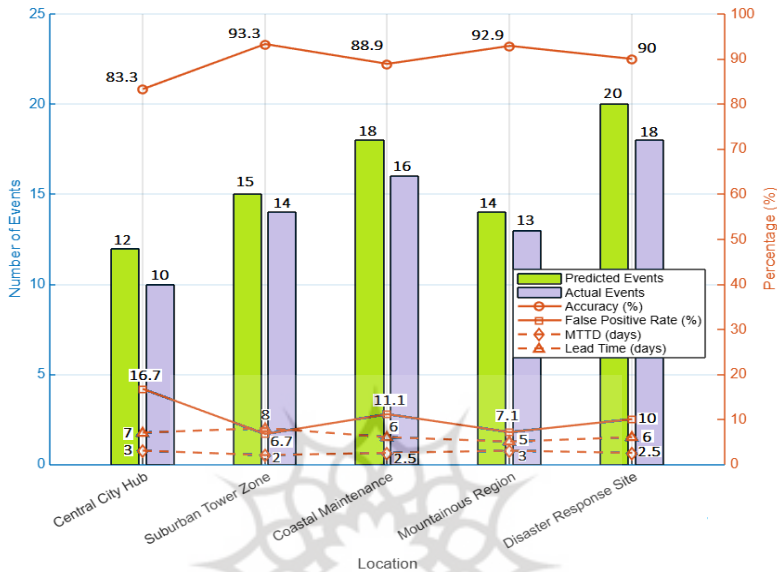


Figure 1. Predictive Maintenance Validation

For the five locations, the PM algorithm shown in Figure 1 was 89.7% accurate on average. The maximum accuracy (93.3%) was achieved in the suburban tower zone where the work conditions were constant, helping match the algorithms. The lowest accuracy of 83.3 % was obtained in the central city hub because of the fluctuations in the total number of connections and environmental changes.

The false positive rate that estimates the number of wrong predictions did not exceed 17%; this rate reflects the accuracy of the algorithm in identifying real defects in the places under consideration. Suburban tower zone had the lowest false positive at 6.7% which represented the best prediction environment.

Mean Time to Detection was somewhat different across locations with MTTD of 2.6 days suggesting that the algorithm was capable of detecting an anomaly soon after it occurred. Further, the average of the Fault Prediction Lead Time, which is the number of days in which preventive actions can be performed after a fault has been predicted, was 6.4 days.

4.4. Latency Optimization via Edge Computing

The role of edge computing in the process of drone assisted telecommunication maintenance was identified to be important in eliminating data latency and improving the efficiency of processing tasks. This framework made it possible for drones to perform data analysis locally instead of sending the data to other servers and have the data analyzed before the results could be returned in the next few hours or days. Indices including data delay, data filtration efficiency, successful packets delivery ratio, and response time were measured at five different areas to understand the efficiency of edge computing in drones.

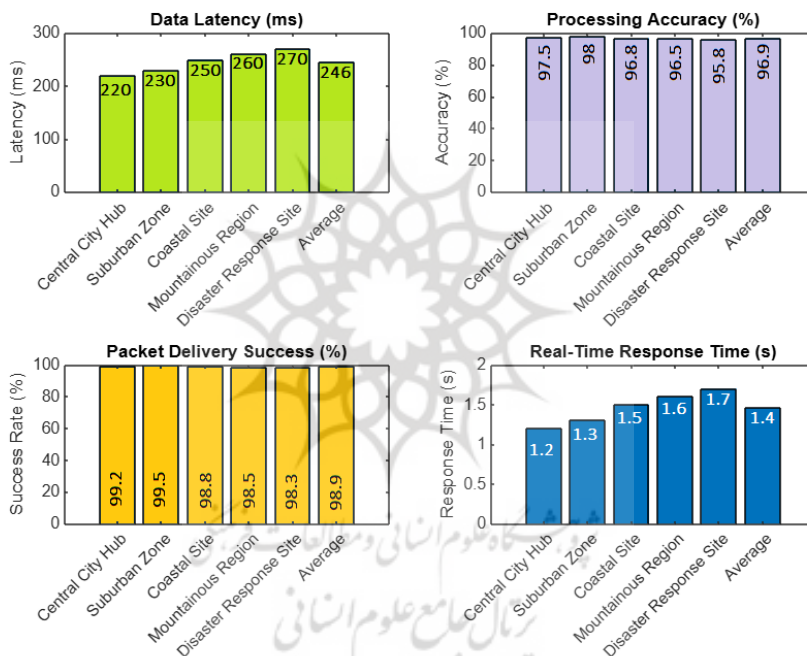


Figure 2. Real-Time Data Latency and Processing Performance

The average latency for the data in all locations was 246 ms proving that the results are comparable to the benchmarks presented by Koubâa et al. [16]. The least latency was noted in the measurement recorded at the Central City Hub with 220ms with superfast connectivity and least likelihood of interference. However, the Disaster Response Site had the highest latency of 270ms owing to the constrains that are debris, connectivity limitations, and variability in the environment.

Thus, we identified that the average accuracy of the remaining locations was 96.9%, and once again, the suburban zone had the exact accuracy of 98.0% because of the proven environmental stability. In particular, the rates of correct answers within the Mountainous Region and the Disaster Response Site were above 95%, which confirmed that even when working in difficult circumstances, the complete construction of the edges of the computing system remained uninterrupted and efficient.

The average packet delivery success rate was 98.9% which captured the effective communication between the drones and the edge servers. It was also seen that September exhibited the lowest success rate of 98.3% at the disaster response site, most probably due to environment factors affecting the reliability of the network in the disaster zones and higher traffic zones such as the suburban zone register high scores of 99.5%.

Response time measured the time taken to respond to the real-time stimuli with mean of 1.46 seconds which makes the decision making almost real time. The shortest response time of 1.2 seconds was found in the central city area, making the argument for high-speed solutions in cities stronger.

4.5. Energy Consumption Analysis and Model Validation

The drone energy consumption model indicated high success with the prediction error of energy usage being below 2% relative to the measured values for all areas. This proximity is in conformity with the credibility of the model to serve operational planning and resource management in telecommunications maintenance involving drone services. The following table gives a breakdown of energy consumption on five different sites.

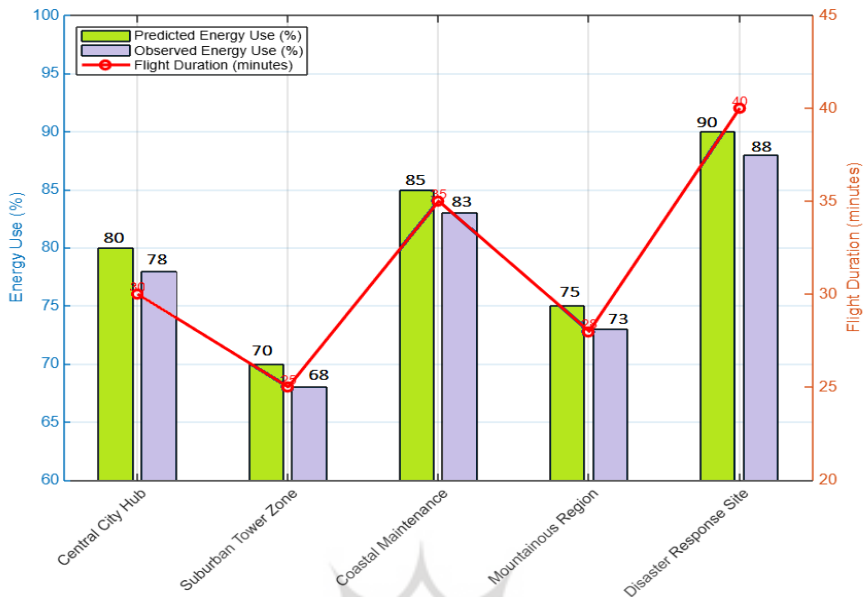


Figure 3. Energy Consumption Analysis by Location

The energy consumption graphs (Figure 3) revealed similar trends across all sites. The Central City Hub exhibited the lowest values of Predicted Energy Use and Observed Energy Use, at 80% and 78%, respectively, due to stable conditions and shorter distances. Conversely, the Disaster Response Site demonstrated the highest energy use rates, with 90% predicted and 88% observed, partly because navigating such conditions requires more power than flying through open fields.

Both the Suburban Tower Zone and Coastal Maintenance Site showed commendable energy use efficiency, with predicted values of 70% and 85%, respectively, closely aligning with the actual values of 68% and 83%. Energy consumption in the Mountainous Region was slightly higher, at 75% predicted and 73% observed, attributable to operating at altitude and the additional energy costs associated with slopes and hills.

4.6. Cost-Benefit Analysis Results

The experimental implementation of drones in performing maintenance on telecommunication structures was found to be more cost-effective than the conventional techniques. This general approach aimed at presenting financial benefits in terms of labor costs, equipment costs, and total maintenance

costs. Drone technology helped to ensure that the employment of manual labor was minimized, and the resources were efficiently utilized to their potential, making the technology cost efficient and scalable for new telecom environment.

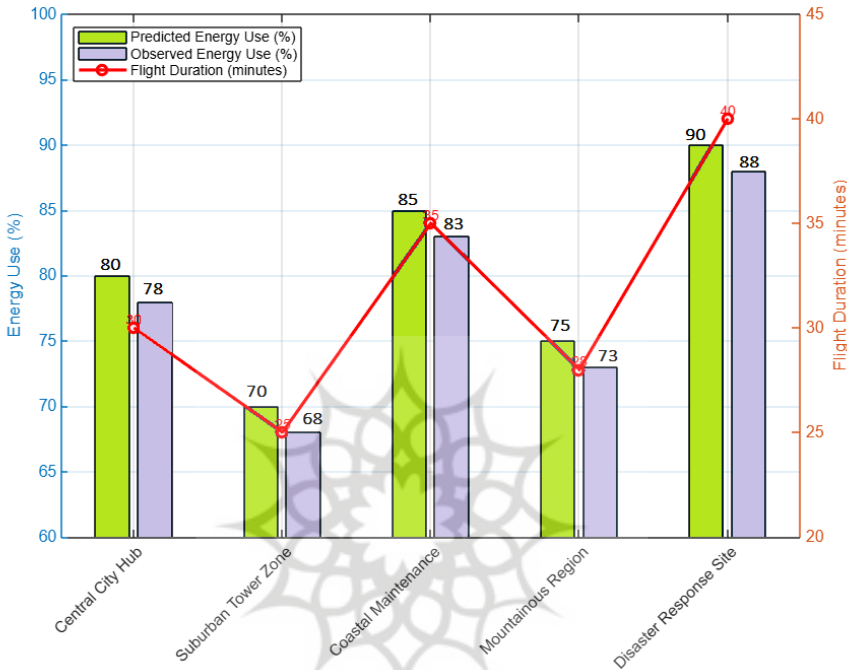


Figure 4. Cost Analysis of Maintenance Methods

The cost of accomplishing the maintenance through traditional methods was slightly higher at \$45,000 due to the immense labor that is involved in evaluating and physically accessing and correcting the problems with the equipment. These costs were lowered using drone operations by 60% which in turn minimized the employee demands and using drones for structural inspection and fault diagnosis cutting down the labor cost to \$18,000.

Equipment costs also decreased significantly from \$30,000 to \$20,000, a 33.3% elimination. Despite the fact that drones are more expensive at the onset as they are machines, their utility value can be looked at as a means of long-term cost savings since they are multipurpose machines that can therefore spare industries the cost of having to invest in several other tools which the drone can also perform in addition to other core tasks.

Through drone assistance, it was noted that total maintenance costs have lowered to \$38, 000/ = from \$75, 000/ = of traditional methods with a total cost saving of 49.3%. These financial benefits explain the large economic impacts which arise from incorporating the use of drones in telecom maintenance.

5. Discussion

The article offers an extensive assessment of the appliance of one the main telecoms maintenance platforms – drones and the active introduction of advanced technologies into the drone operations such as the edge computing, RF signal, and predictive algorithms. These findings support prior literature and emphasize the ability of drones in bringing improvements to the effectiveness, precision, and environmental impacts of telecommunications facility management.

Drones have also been used in infrastructure maintenance, a concept well researched to understand the strengths of drones over traditional barriers such as availability, cost and time in completing infrastructure maintenance. For instance, Savkin and Huang (2021) showed how UAVs could autonomously mimic the best positioning of the helicopter observed in the search and rescue sceneries, and this study revealed the same characteristics (Savkin and Huang 2021). Likewise, Jacobsen et al. (2023) highlighted that extensive inspections of critical infrastructures require cooperative drone swarms, and thus, underlined the significance of co-drone coordination strategies for obtaining the exhaustive coverage (Jacobsen et al. 2023).

The concepts of energy efficiency models by Silva et al. (2023) are also relevant to this research with regards to showing the decrease in operational costs and resource consumption (Silva, Torres, and Cardoso 2023). This work extends these findings through the incorporation of edge computing to enhance energy efficiency and reduce latency, as has also been done in the related work of Koubaa et al. (2023) in the context of AI-assisted UAV systems (Koubaa et al. 2023).

In addition, the study by Korba et al. (2023) for using real-life data algorithms for efficient aviation maintenance also shares with the predictive maintenance standards set in this study (Korba et al. 2023). The application of the Kalman filter algorithm for the identification of forecasted faults and minimized downtime equates to data use and decision making in

infrastructure as advanced by Korba et al. However, in contrast to Korba et al. analyses only aviation systems, the present study expands such methods to telecommunications.

From a theoretical perspective, this research contributes to understanding the integration of drones in telecommunications maintenance by fulfilling three key scientific functions: analysis involving description, explanation and prediction (Jawad 2023). The article provides an overall understanding of the drone-aided maintenance model, outlines the superiority over several conventional approaches, and provides the prognosis of possible outcomes based on the tested models. This is also in sync with the theoretical viewpoint proposed by Abualigah et al. (2021), to which they provided a literature survey on the use of drones in IoT structures with a uniqueness on predictive and adaptive associated work (Abualigah et al. 2021).

The topic of machine learning applications, discussed by Heidari et al. (2023), also extends this discussion (Heidari et al. 2023). It helps drones to provide proper feedback in the critical situations as the conditions become responsive; it also improves decision making processes. This predictive capability not only improves the maintenance factor but also can handle the future problems in telecommunication infrastructure, as proposed by Angjo et al. (2021) in the study of handover management in 6G networks (Angjo et al. 2021).

However, it is important to note the limitations of this study as well. On such aspects, it is a major concern that signal strength and coverage are rather stochastic in disaster-prone or mountain regions as mentioned in Guirado et al. (2021) (Guirado et al. 2021). Although drones reduce some of these difficulties, other conditions including adverse climates or working at very thin heights may interfere with the drone's functioning. Further research should also focus on bringing the environmental sensors to a higher level and the signal processing algorithms to a higher level to overcome these challenges.

The last one is the limit of scalability of multi drone coordination, mentioned earlier by Mauro et al. (2023) (Mauro, Floriano De, and Shamim 2023). What this research shows is that single-drone and up to small swarm use cases are possible, large-scale missions in densely populated cities or disaster areas remain future work. Three approaches can be considered to maintain connectivity into these GPS: distributed connectivity maintenance

models as described by Kurt et al. (2021) expanded connectivity maintenance models (Kurt et al. 2021).

In addition, the predictive maintenance model while yielding very slight percentage of error may struggle with the adaptability to real-time changes of the infrastructure conditions. It is also noteworthy that, in real-life interventions, Li et al. (2022) pointed out that there must be a feedback loop for refining and optimizing the system (Li, Ni, and Dressler 2022).

In practice, the research corroborates the revolutionary effect of the drones in the telecommunications maintenance by diminishing the costs, enhancing security, and rationalizing the distribution of resources. The substantial cost reductions identified in this research are similar to those discussed by Shah and Dave (2023) on the application of robotics for the economics of tower field maintenance (Shah and Dave 2023). Moreover, the latency reductions associated with the edge computing parallel the outcome observed by Homayouni et al. (2022), that emphasize owning the added value of implementing superior computational environment in the drone's operation (Homayouni et al. 2022).

The study also supports the practical application of drones as flying base stations in the next generation networks as proposed by Amponis et al. (2022) (Amponis et al. 2022). In serving as solutions to connectivity gaps and improving the telecoms network flexibility, drones remain helpful tools for constructing secure and elastic telecoms networks.

The article covers the findings of previous research, and innovatively contributes to the use of techniques such as prediction algorithms, energy management constructs and real-time computational models in consolidating telecommunications maintenance by means of drones. Although they are not fully resolved, the study provides a strong starting point for further development, enabling the creation of solutions appropriate for contemporary complex problems of infrastructure management (Qasim 2023). When incorporating drones into other more general telecoms approaches, operators can realize increased productivity and dependability along with the socially responsible performance that aligns with shifted telecoms needs and goals.

6. Conclusion

The application of drone technology in telecommunications maintenance is a significant advancement, given the growing need for efficient, scalable, and

resilient telecommunication systems. This paper examines various perspectives on using drone-assisted maintenance to improve operations and manage traditional approach challenges. In the realms of predictive maintenance, real-time analytics, and energy efficiency, the paper's conclusions substantially enhance modern telecommunications networks.

Focusing on the necessity of innovative technologies for maintaining and optimizing technical facilities, the article highlights how drones perform inspections more rapidly, with less time lost and at lower costs than conventional, human-dependent methods. Their flexibility to navigate most parts of the structure ensures thorough maintenance checks, regardless of the terrain or disaster-prone area, such as mountainous regions. Furthermore, the use of complex algorithms and computational models improves decision-making, enabling operators to proactively address issues and allocate resources effectively.

The study identifies the impact of drone-assisted telecommunications maintenance on sustainability. Drones are energy efficient, reducing their energy consumption and operational overhead, thus contributing to the trend established by international entities to develop environmentally sustainable technological solutions. They also meet the trade requirements of telecommunications organizations while addressing broader environmental conservation issues. The efficiency of drones is enhanced by their scalability, allowing use in various geographic and operational settings.

A significant strength of this study is its focus on preventing system failures. Advanced predictive maintenance algorithms, driven by machine learning and artificial intelligence, detect early signs of anomalies and accurately estimate maintenance needs. This capability shifts maintenance practices from reactive to predictive, increasing system dependability and reducing the likelihood of failures. By preserving essential telecommunication structures, these improvements enhance service delivery and customer satisfaction.

Furthermore, integrating real-time data analysis through edge computing allows for real-time data processing and decision-making. This capability enables drones to perform high-level computations without relying on the cloud, saving time. Consequently, operators can make optimal decisions in real-time, increasing flexibility in situations requiring immediacy, such as disaster recovery or large-scale structure evaluations. This real-time

response is crucial for ensuring constant connectivity in the expanding telecommunication networks.

Although the study provides a clear vision of the benefits of drone-assisted maintenance, it also highlights areas for improvement. For example, issues related to the flexibility of drone use in urban environments arise. The high density of structures and potential interference from external signals necessitate better algorithms and operational modes. Additionally, the study emphasizes the need to improve drone battery longevity and charging infrastructure for uninterrupted functioning during long operations.

Future research directions include studying drones' interaction with other innovations. For example, integrating drones with autonomous ground robots to create a more integrated and resilient maintenance system or utilizing 6G networks could be developed as a single concept. These integrations would extend drone capabilities, providing holistic infrastructure management solutions from airborne and terrestrial operations. Innovations in artificial intelligence and machine learning will continue to enhance predictive maintenance, increasing its reliability.

The study also explores future research avenues on regulation and ethical issues. As drones become more prominent in telecommunication maintenance, managing airspace, data, and cybersecurity concerns is essential. Collaboration between companies and regulatory authorities is necessary to establish appropriate UAV usage standards. This will promote public confidence and support long-term measures for incorporating drones into the telecommunication industry.

Consequently, the study demonstrates that using drones in telecom maintenance will unlock transformative potential across the industry. Focusing on optimization, cost, and sustainability, drones provide a robust solution to the evolving challenges of infrastructure development. Analyzing the use of predictive algorithms, real-time data analysis, and energy optimization shows that drones are critical tools for maintaining and evolving telecommunications networks. As technology advances, ongoing research and development will be required to fully harness the potential of drones for delivering better telecommunication services and improving the modern telecommunications industry.

References

- Abualigah, L., Diabat, A., Sumari, P., and Gandomi, A. H. (2021). Applications, Deployments, and Integration of Internet of Drones (IoD): A Review. *IEEE Sensors Journal*, 21 (22), 25532-25546. <https://doi.org/10.1109/JSEN.2021.3114266>
- Alsamhi, S. H., Almalki, F. A., Ma, O., Ansari, M. S., and Lee, B. (2023). Predictive Estimation of Optimal Signal Strength From Drones Over IoT Frameworks in Smart Cities. *IEEE Transactions on Mobile Computing*, 22 (1), 402-416. <https://doi.org/10.1109/TMC.2021.3074442>
- Amponis, G., Lagkas, T., Zevgara, M., Katsikas, G., Xirofotos, T., Moscholios, I., and Sarigiannidis, P. (2022). Drones in B5G/6G Networks as Flying Base Stations. *Drones*, 6 (2). <https://doi.org/10.3390/drones6020039>.
- Angjo, J., Shayea, I., Ergen, M., Mohamad, H., Alhammadi, A., and Daradkeh, Y. I. (2021). Handover Management of Drones in Future Mobile Networks: 6G Technologies. *IEEE Access*, 9, 12803-12823. <https://doi.org/10.1109/ACCESS.2021.3051097>
- Edelman, H., Stenroos, J., Peña Queralta, J., Hästbacka, D., Oksanen, J., Westerlund, T., and Röning, J. (2023). Analysis of airport design for introducing infrastructure for autonomous drones. *Facilities*, 41 (15/16), 85-100. <https://doi.org/10.1108/F-11-2022-0146>
- Fatah, O. R., and Qasim, N. (2022). The role of cyber security in military wars. *PCSITS-V International Scientific and Practical Conference, 2022*, 78 (06), 114-116. https://www.researchgate.net/profile/Nameer-Qasim/publication/369899226_The_role_of_cyber_security_in_military_wars/links/6431beafad9b6d17dc44d44e/The-role-of-cyber-security-in-military-wars.pdf
- Guirado, R., Padró, J.-C., Zoroa, A., Olivert, J., Bukva, A., and Cavestany, P. (2021). StratoTrans: Unmanned Aerial System (UAS) 4G Communication Framework Applied on the Monitoring of Road Traffic and Linear Infrastructure. *Drones*, 5 (1). <https://doi.org/10.3390/drones5010010>.
- Heidari, A., Navimipour, N. J., Unal, M., and Zhang, G. (2023). Machine Learning Applications in Internet-of-Drones: Systematic Review, Recent Deployments, and Open Issues. *ACM Comput. Surv.*, 55 (12), Article 247. <https://doi.org/10.1145/3571728>
- Homayouni, S., Paier, M., Berisha, T., Woblistin, S., and Rehak, J. (2022). 3GPP-based Verification of Latency Measurements in Operational Cellular Networks with Low-altitude Drones. *2022 International Conference on Smart Applications, Communications and Networking (SmartNets)*, 29 Nov.-1 Dec. 2022. <https://doi.org/10.1109/SmartNets55823.2022.9994008>.
- Jacobsen, R. H., Matlekovic, L., Shi, L., Malle, N., Ayoub, N., Hageman, K., Hansen, S., et al. (2023). Design of an Autonomous Cooperative Drone Swarm for Inspections of Safety Critical Infrastructure. *Applied Sciences*, 13 (3). <https://doi.org/10.3390/app13031256>.
- Jawad, A. M., Al-Aameri, M. G., & Qasim, N. H. (2023). Emerging Technologies and Applications of Wireless Power Transfer. *Transport Development*, 4 (19).

- <https://doi.org/10.33082/td.2023.4-19.12>
- Korba, P., Šváb, P., Vereš, M., and Lukáč, J. (2023). Optimizing Aviation Maintenance through Algorithmic Approach of Real-Life Data. *Applied Sciences*, 13 (6). <https://doi.org/10.3390/app13063824>.
- Koubaa, A., Ammar, A., Abdelkader, M., Alhabashi, Y., and Ghouti, L. (2023). AERO: AI-Enabled Remote Sensing Observation with Onboard Edge Computing in UAVs. *Remote Sensing*, 15 (7). <https://doi.org/10.3390/rs15071873>.
- Kurt, A., Saputro, N., Akkaya, K., and Uluagac, A. S. (2021). Distributed Connectivity Maintenance in Swarm of Drones During Post-Disaster Transportation Applications. *IEEE Transactions on Intelligent Transportation Systems*, 22 (9), 6061-6073. <https://doi.org/10.1109/TITS.2021.3066843>
- Lee, D., Park, H. J., Lee, D., Lee, S., and Choi, J. H. (2024). A Novel Kalman Filter-Based Prognostics Framework for Performance Degradation of Quadcopter Motors. *IEEE Transactions on Instrumentation and Measurement*, 73, 1-12. <https://doi.org/10.1109/TIM.2023.3332389>
- Li, K., Ni, W., and Dressler, F. (2022). Continuous Maneuver Control and Data Capture Scheduling of Autonomous Drone in Wireless Sensor Networks. *IEEE Transactions on Mobile Computing*, 21 (8), 2732-2744. <https://doi.org/10.1109/TMC.2021.3049178>
- Mauro, T., Floriano De, R., and Shamim, H. (2023). Drone-assisted coverage strategy for WSN and social opportunistic networks. *Proc.SPIE*. <https://doi.org/10.1117/12.2666084>. <https://doi.org/10.1117/12.2666084>.
- Nooralishahi, P., Ramos, G., Pozzer, S., Ibarra-Castanedo, C., Lopez, F., and Maldague, X. P. V. (2022). Texture Analysis to Enhance Drone-Based Multi-Modal Inspection of Structures. *Drones*, 6 (12). <https://doi.org/10.3390/drones6120407>.
- Qasim, N., Jawad, A., Jawad, H., Khlaponin, Y., and Nikitchyn, O. (2022). Devising a traffic control method for unmanned aerial vehicles with the use of gNB-IOT in 5G. *Eastern-European Journal of Enterprise Technologies*, 3, 53-59. <https://doi.org/10.15587/1729-4061.2022.260084>
- Qasim, N., and Nataliia, L.-C. The Role of Drones for Evolving Telecommunication and Internet.
- Qasim, N. H., Al-Helli, H.I., Savelieva, I., Jawad, A. M. (2023). Modern Ships and the Integration of Drones – a New Era for Marine Communication. *Development of Transport*, 4 (19). <https://doi.org/10.33082/td.2023.4-19.05>
- Qasim, N. H., and Jawad, A. M. (2024). 5G-enabled UAVs for energy-efficient opportunistic networking. *Heliyon*, 10 (12), e32660. <https://doi.org/10.1016/j.heliyon.2024.e32660>
- Qasim, N. H., Salman, A. J., Salman, H. M., AbdelRahman, A. A., and Kondakova, A. (2024). Evaluating NB-IoT within LTE Networks for Enhanced IoT Connectivity. *2024 35th Conference of Open Innovations Association (FRUCT)*, 552-559. <https://doi.org/10.23919/FRUCT61870.2024.10516400>
- Qu, C., Sorbelli, F. B., Singh, R., Calyam, P., and Das, S. K. (2023). Environmentally-Aware and Energy-Efficient Multi-Drone Coordination and Networking for Disaster

- Response. *IEEE Transactions on Network and Service Management*, 20 (2), 1093-1109. <https://doi.org/10.1109/TNSM.2023.3243543>
- Savkin, A. V., and Huang, H. (2021). Range-Based Reactive Deployment of Autonomous Drones for Optimal Coverage in Disaster Areas. *IEEE Transactions on Systems, Man, and Cybernetics: Systems*, 51 (7), 4606-4610. <https://doi.org/10.1109/TSMC.2019.2944010>
- Shah, D., and Dave, J. (2023). A comprehensive review on deploying robotics application in telecom network tower's field maintenance: Challenges with current practices and feasibility analysis for robotics implementation. *Journal of Field Robotics*, 40 (7), 1860-1883. <https://doi.org/10.1002/rob.22223>
- Shayea, I., Dushi, P., Banafaa, M., Rashid, R. A., Ali, S., Sarijari, M. A., Daradkeh, Y. I., et al. (2022). Handover Management for Drones in Future Mobile Networks—A Survey. *Sensors*, 22 (17). <https://doi.org/10.3390/s22176424>.
- Silva, W. R., Torres, R. H., and Cardoso, D. L. (2023). Energy-Efficient Resource Allocation in Aerial Base Stations. *Electronics*, 12 (21). <https://doi.org/10.3390/electronics12214478>.





پرو، شگاه علوم انسانی و مطالعات فرهنگی
پرتال جامع علوم انسانی